

AIR TOOLS





AIR TOOLS Index:

Air Impact Wrenches	336-346
Nutrunners	347
Air Ratchets	348-351
Air Drills	352
Air Hammers	353-355
Air Chisel Open Stock	355
Air Die Grinders	356-361
Cut-Off Tools	361-362
Air Sanders & Polishers	363-375
Air Saws	376
Air Specialty Tools	377-379
Air Blow Guns	380-382
Air Tool Lubricants/Oilers	382
Air Fittings	383-387
Air Compressors	388-392
Hoses:	
Rubber Hoses	393-397
Whip Hoses & Snubber Hoses	397-398
Utility Hoses	398
Hose Reels	399-403
Accessories	404
Compressor and Inflator Kits	405

AIR IMPACT WRENCHES



IRT2115QXPA 3/8" Drive Composite Quiet Impact Wrench

- High Speed Performance: 15,000 RPMs allows you to complete jobs faster
- Steel-lined Aluminum Hammer Case: Protects interior components without adding weight
- Lightweight: Only 2.5 lbs.
- Sound baffling design keeps noise to a minimum
- Power Regulator: Manage your output torque by turning down the power regulator to minimize the chance of damage from over-tightening your bolt



IRT2115TIMAX 3/8" Drive Titanium Impact Wrench

- Max power - 300 ft-lbs of maximum reverse torque
- Max control - new feather touch trigger and one handed forward and reverse control
- Less than 6" long; weighs less than 2.5 lbs.
- Titanium hammer case is lightweight with unparalleled durability
- 2 year warranty



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT15QMAX 3/8" Ultra-Compact Impacttool

- 475 ft-lbs. of nut-busting torque
- The twin hammer mechanism will reduce vibration
- Only 2.4 lbs
- Push button, forward/reverse buttons, and power regulator dial



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT35MAX 1/2" Ultra-Compact Impacttool

- 650 ft-lbs. of nut-busting torque
- IR Twin Hammer
- Features 3 different regulation settings, as well as an easy to operate and user-preferred forward/reverse button



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT35-BOOT Boot Cover for IRT35MAX and IRT15QMAX

- Keeps tools clean and protected

IRT2135QTL-2 1/2" Drive Torque Limited Impact Wrench

- Limited forward torque: Prevents overtightening of lug nuts and minimizes the risk of damaging wheels
- Max reverse torque: 780 ft-lbs removes stuck lug nuts with ease
- Advanced impact mechanism: 3x more durable than our previous torque limiting impact wrenches
- Chemical resistant housing: Protects against exposure to shop fluids
- Lightweight: Weighs only 4.3 lbs to help reduce fatigue with repeated use



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT231C 1/2" Drive Super Duty Impacttool™

- Maximum torque: 600 ft-lbs
- IR Twin Hammer Mechanism
- Adjustable power regulator
- Pressure feed lubrication



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT231HA 1/2" Drive Super Duty Air Impacttool™

- Pressure-fed lubrication system
- Handle exhaust directs air away from user
- Adjustable power regulation
- Maximum torque: 590 ft./lbs. (800 ft./lbs. reverse)
- Contoured comfort handle



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



IRT231HA-2 1/2" Drive Super Duty Air Impact Wrench with 2" Extended Anvil

- In-handle exhaust directs air away from user
- Contoured comfort handle
- 590 ft./lbs. maximum torque
- Pressure feed lubrication system
- Adjustable power regulation

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2235QTIMAX 1/2" Drive Quiet Impact Wrench

- 1,300 ft.-lbs of quiet, nut busting torque, with a twin-hammer impact mechanism
- Only 4.6 lbs.
- At 91.9 dBA IR Quiet Technology
- 2 year warranty, one-handed forward/reverse control, feather-touch trigger and 4-position power regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2235QTIMAX-2 1/2" Drive Quiet Titanium Impact Wrench with Extended Anvil

- 1,300 ft.-lbs. of quiet nut busting torque, with twin-hammer impact mechanism
- 2 year warranty, one-handed forward/reverse control, feather-touch trigger, and 4-position power regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2235TIMAX 1/2" Drive Impact Wrench

- 1,350 ft.-lbs of nut busting torque, powered by Ingersoll Rand's finely tuned twin-hammer impact mechanism
- Only 4.6 lbs.
- Backed by a 2 year warranty
- One-handed forward/reverse control, feather-touch trigger, and 4-position power regulator

IRT2235TIMAX-2 1/2" Drive Titanium Impact Wrench with Extended Anvil

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2130 1/2" Drive Heavy Duty Impactool™

- 550 ft./lbs. maximum torque
- Full stroke tease throttle
- Easy glide forward/reverse switch
- Multi-position power management
- Lightweight, reinforced aluminum hammercase

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT232TGSL 1/2" Drive Street Legal "Thunder Gun" Impact Wrench

- Distinctive appearance, similar to the IR ThunderGun racing tool
- Adjustable power regulator
- Our fastest 1/2" impact wrench
- 625 ft.-lbs max reverse torque
- 500 ft.-lbs forward torque

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2135QXPA 1/2" Composite Quiet Impact Wrench

- With 1,100 ft.-lbs. of nut busting torque. All powered by Ingersoll Rand's finely tuned motor and twin-hammer impact mechanism
- Ingersoll Rand's Quiet Technology reduces the sound of the tool
- Backed by a one-year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT244A 1/2" Drive Super Duty Impact Wrench

- Powerful, smooth balanced blows
- Pressure feed lubrication system automatically greases the impact system
- Working torque: 40-350 ft./lbs
- Maximum torque: 500 ft./lbs
- Variable speed trigger
- 1 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR IMPACT WRENCHES



IRT2145QIMAX

3/4" Drive Composite Impact Wrench

- 1,350 ft-lb maximum reverse torque from a tool that weighs just 7.4 lbs and is compact enough to access tight spaces
- Designed to withstand tough use
- An air motor that's 16% more efficient
- 2 year limited warranty
- Quiet Technology - 91.1dbA



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT259

3/4" Drive Impact Wrench

- Delivers 1,050 ft-lbs of maximum torque in both forward and reverse
- New ergonomic design for easy two-handed operation
- Two power settings in forward and reverse
- Lightweight at only 8.8 lbs
- Silenced exhaust reduces tool noise to only 91.6 dbA while in use



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT261

3/4" Drive Super Duty Air Impact Wrench

- Jumbo hammer mechanism
- Up to 1,100 ft-lbs of torque
- Trouble free, longer performance aided by the Pressure-Feed Lube System
- Compact; only 8.8" long
- Handle exhaust



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT271

1" Drive Super Duty Air Impact Wrench

- Impressive power-to-size ratio
- Up to 1,100 ft-lbs. of torque
- Pressure-feed lube system
- Dead handle improves operator control
- Free-speed 5,500 RPM



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT295A

1" Drive Heavy Duty Air Impactool™

- 1,770 ft.-lbs. maximum torque at 120 PSI with 5,250 rpm free speed and a high efficiency 6 vane motor
- Fast torque delivers 1,000 ft.-lbs. in 2 seconds
- Handle exhaust directs air away from the work
- Top mounted dead handle provides great leverage
- 3 position power regulator for torque management
- 1 year warranty on material and workmanship



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT2175MAX

1" Drive Pistol Grip Impact Wrench

- Delivers 2,000 ft lbs of reverse torque
- Chemical resistant housing & steel core
- Lightweight: Weighs in under 20 lbs
- 360 Degree adjustable handle: Keeps hoses from getting tangled so you can move freely around the garage



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2850MAX-6

1" D-Handle Impact Wrench with 6" Anvil

- Delivers 2,100 ft-lbs of torque
- The steel core and chemical resistant housing is made to last even in the harshest working conditions
- At only 21 lbs this light weight design reduces user fatigue
- 2 year warranty on material and workmanship



IRT285B-6

1" Drive Heavy Duty Impact Wrench with 6" Anvil

- Maximum torque: 1,770 ft-lbs
- New Fast-Torque feature delivers 1,000 ft-lbs in 2 seconds
- New increased pressure rating can withstand 120 PSI for better durability
- Improved feather-touch trigger
- Free chemical resistant protective boot helps prevent damage



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



CPT724H

3/8" Drive Heavy Duty Impact Wrench

- Maximum torque: 200 ft.-lbs.
- Pin clutch mechanism in oil bath
- Curved handle with Thermo-Plastic Rubber injected in housing for a durable/comfortable grip
- Full teasing trigger
- 360° air inlet swivel keeps air hose from being twisted
- One hand push button forward/reverse power regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT721

3/8" Drive Heavy Duty Air Impact Wrench

- Working torque: 5-50 ft.-lbs.; maximum torque: 75 ft.-lbs.
- Rocking dog clutch
- Energy efficient motor
- Pistol-type grip
- Free speed: 11,000 RPM

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7731

3/8" Stubby Impact Wrench

- Ultra compact and powerful: 415 ft.-lbs in reverse
- Rugged and lightweight: steel front cover and aluminum alloy body
- All controls on front of tool and adjustable for either right or left handed operation • Only 4.4" long

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7727

3/8" Angle Impact Wrench

- 185 ft.-lbs of maximum torque in reverse
- Steel motor • Aluminum housing
- Full teasing trigger • Only 2.5 lbs.
- 3 positions in forward and 1 in reverse

CPT7737

1/2" Extended Angled Impact Wrench

- 220 ft.-lbs of max. torque in reverse

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7722

3/8" Drive Butterfly Impact Wrench

- 90 ft.-lbs. • 360° swivel air inlet
- Built in regulator for controlled torque
- Rocking dog clutch • Butterfly throttle

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Chicago Pneumatic

CPT734H

1/2" Drive Heavy Duty Air Impact Wrench

- DYNA-PACT oil bath clutch delivers smooth operation and extended durability
- 360° air inlet swivel
- Air inlet thread: 1/4" NPTF
- Minimum hose size: 3/8"
- Length: 7.5" • Weight: 5.13 lbs.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT749

1/2" Drive Super Duty Air Impact Wrench

- Working torque: 50-450 ft.-lbs
- Maximum torque: 610 ft.-lbs
- CP's patented SpringHammer oil bath clutch
- One-handed reverse button with 4 power settings
- Air inlet thread: 1/4" NPTF
- Weight: 5.5 lbs.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7748

1/2" Drive Composite Impact Wrench

- 960 ft.-lbs of max torque in reverse
- One-hand reverse system (Ring system)
- Hard anodized end plates / Hard chromium aluminum cylinder / Twin hammer mechanism
- 6.89" in length
- Only 4.4 lbs in weight thanks to its composite motor housing
- 360 degree swivel air inlet

CPT7748-2

1/2" Drive Composite Impact Wrench with 2" Extension

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT8940175618

Protective Boot Cover (Only) for Models CPT7748 and CPT7748-2

- Made of durable PVC material
- Adds grip for the handler
- Helps protect the tool from drops and every day use

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR IMPACT WRENCHES



**Chicago
Pneumatic**

CPT7749

1/2" Drive Composite Impact Wrench

- 955 ft.-lbs of extreme torque
- S2S Technology for forward / reverse
- Ergonomic composite handle
- 3 positive power settings
- Full teasing trigger allows full control when tightening or loosening fasteners



CPT7749-2

1/2" Drive Composite Impact Wrench with 2" Extended Anvil

CPT7732C

1/2" Composite Stubby Impact Wrench

- 460 ft.-lbs of maximum torque in reverse
- Steel motor • Aluminum clutch housing
- Side 2 Side (S2S): 1 hand forward/reverse operation
- 2 positions in forward and reverse: max and lower torque



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT7732

1/2" Ultra Compact & Powerful Impact Wrench

- Excellent power to weight ratio: 450 ft.-lbs
- Ultra compact: 4.4" long
- Forward/reverse lever rotates to be on either the left or right side of the tool



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT7736

1/2" Impact Wrench

- 670 ft.-lbs max reverse
- Well balanced minimizing wrist strain
- Metal Tool with Twin Hammer clutch
- 3 power settings in forward and one in reverse



CPT7736-2

1/2" Drive Impact Wrench with 2" Anvil

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT749-2

1/2" Super Duty Impact Wrench with 2" Anvil

- Ultimate torque: 625 ft.-lbs.
- Patented clutch provides smooth operation and extreme durability
- One hand push button forward/reverse power regulator
- 2" extended anvil for tire work



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



**Chicago
Pneumatic**

CPT8940176138

1/2" Drive Impact with 3 Wheel Sockets Kit

- New Ergonomic Forward/Reverse & Power Control Ring System
- Compact & Lightweight
- Max Working Torque of 960 ft.-lbs.
- Durable Twin Hammer mechanism
- Includes 3 Piece Wheel Socket Set (17-19-21 mm) & Soft Tool Bag



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT7762

3/4" Stubby Impact Wrench

- 1050 ft.-lbs. of torque
- Compact at 6.2 inches in length
- Lightweight at 6.6 lbs.
- Twin Hammer mechanism
- Highly durable with a steel motor, and aluminum housing



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT772H

3/4" Drive Super Duty Air Impact Wrench

- 4-position power settings in forward and ultimate power in reverse
- Working torque: 150-700 ft.-lbs
- Maximum torque: 1000 ft.-lbs
- Handle exhaust with 360° air inlet swivel
- Average air consumption: 6 cfm • Air inlet thread: 3/8" NPTF
- Minimum hose size: 1/2" • Sound dBA: 96
- Length: 9.63" • Weight: 10.5 lbs.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT7763

3/4" Drive Heavy Duty High Power Impact Wrench

- 1200 ft.-lbs of torque
- Weighs less than 12 lbs.
- 6-vane motor for speed - power with any 1/2" hose air supply
- Twin hammer high performance clutch
- Ergonomic handle exhaust



CPT7763-6

3/4" Drive Heavy Duty Impact Wrench with 6" Anvil

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



**Chicago
Pneumatic**



CPT7783-6

1" Drive Lightweight Impact Wrench with 6" Anvil

- 1770 ft.-lbs. maximum torque in reverse • Weighs 20.9 lbs
- Pinless closed reinforced rocking dog mechanism in oil bath
- Features an adjustable top or down exhaust

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT797-6

**1" Drive Super Duty
Impact Wrench with 6" Anvil**

- Working torque: 150-900 ft.-lbs.; maximum torque: 1400 ft.-lbs
- Rocking dog clutch • Teasing throttle for easy bolt starting

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7782

**1" Drive Impact Wrench,
Short Anvil**

- Powerful 1,920 ft. lbs of maximum torque in reverse
- Durable, closed reinforced rocking dog impact mechanism
- Regulator with integrated forward/reverse with 3 position power settings in both directions • Full teasing throttle

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



**Chicago
Pneumatic**



CPT7782-6

**1" Drive Heavy Duty Impact Wrench
with Extended Anvil**



CPT7782-SP6

**1" Drive Heavy Duty Impact Wrench
with 6" Extension and #5 Spline**

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT6120-D35H

1-1/2" Drive Impact Wrench

- 2-Jaw clutch for superior ergonomics and productivity
- Very robust steel clutch housing and aluminum motor housing
- Extremely comfortable handle and adjustable support handle
- Interchangeable inside/outside trigger (parts included)
- Reverse biased 15%, possibility to change to forward biased by turning around the air motor cylinder

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181550

3/8" Butterfly Drive Impact Wrench

- Built-in power regulator features instant throttle speed
- 11,000 rpm • 3/8" square drive • Rear exhaust
- 5-50 ft.-lbs working torque • 75 ft.-lbs ultimate torque
- 3 CFM average air consumption

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181565

3/8" Drive Air Impact Wrench

- 25-300 ft.-lbs. • 320 ft.-lbs ultimate torque
- 3 cfm air consumption • 9,000 rpm
- 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181560

3/8" Pistol Grip Drive Impact Wrench

- 11,000 rpm • 5-50 ft.-lbs working torque
- 75 ft.-lbs ultimate torque
- 3/8" square drive • 5" length; 2.5 lbs.
- 3 CFM average air consumption

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181622

1/2" Drive Impact Wrench

- 25-180 ft.-lbs. working torque
- 260 ft.-lbs ultimate torque
- 7,000 rpm • 4 cfm air consumption
- 90 PSI air pressure (recommended)
- "Rocking Dog" clutch and built-in power regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



KT181631A

1/2" Drive Air Impact Wrench

- 25-350 ft./lbs. working torque
- 450 ft.-lbs ultimate torque • 7,500 rpm
- 7 cfm air consumption
- 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181632A

1/2 Drive Air Impact with Extended Anvil

- 25-300 ft./lbs. working torque
- 450 ft.-lbs ultimate torque • 7,500 rpm
- 7 cfm air consumption
- 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181772A

3/4" Drive High Performance Impact Wrench

- 100-500 ft.-lbs working torque
- 800 ft.-lbs. ultimate torque
- 4,500 rpm
- 5 cfm air consumption

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181201

3/8" Drive Mini Impact Wrench

- Maximum Torque: 350 ft/lbs (470Nm); Free Speed: 8500 RPM; Air Pressure: 90 PSI; Average Air Consumption: 5.3 CFM; Weighs: 3.75 lbs
- Twin hammer structure, high torque output
- Lightweight, powerful and compact
- One hand control, easy to operate
- Covered by a 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181301

1/2" Drive Mini Impact Wrench

- Maximum Torque: 380 ft/lbs (520Nm); Free Speed: 8500 RPM; Air Pressure: 90 PSI; Average Air Consumption: 5.3 CFM; Weighs: 3.85 lbs
- Twin hammer structure, high torque output
- Lightweight but designed for heavy duty
- Covered by a 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181775

3/4" Drive Heavy-Duty High Power Impact Wrench

- 200-600 ft./lbs. working torque
- 900 ft.-lbs ultimate torque
- 7,000 rpm • 8 cfm air consumption
- 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181774

3/4" Drive Air Impact Wrench

- 100-950 ft./lbs. working torque
- 1200 ft.-lbs ultimate torque • 4,500 rpm
- 8 cfm air consumption
- 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181795

1" Drive Air Impact Wrench with 13 Piece SAE Socket Set

- 100-1100 ft./lbs. working torque
- 1500 ft.-lbs ultimate torque
- 3,500 rpm • 8 cfm air consumption
- 90 PSI air pressure (recommended)

Comes with 13-piece 1" drive short fractional impact socket set, including sizes 3/4" to 3" (KT135113).



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181798A

1" Drive Impact Wrench with 6" Extension Anvil

- 1600 ft/lbs of torque • 4,000 RPMs
- 100-1,200 ft/lbs working torque • 10 CFMs
- 6" extended anvil for extra access
- 3 forward and 3 reverse power settings
- Length: 22-1/2" • Weight: 26.2lbs
- 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR IMPACT WRENCHES



ACA1059-VXL Vibrotherm Drive 3/8" Compact Impact Wrench

- VIBROTHERM DRIVE reduces vibration levels by between 30%-40% and increased the life of the mechanism by 50%
- 500 ft/lbs. Max Torque removes stubborn fasteners
- The latest patented AIRCAT muffler system produces the characteristic AIRCAT unmatched low noise levels
- The patented grip design provide the customary AIRCAT operator comfort

ACA1077-TH 3/8" Drive Super Compact Impact

- Only 3.85" long to get in small areas
- Weighs only 2.75 lbs
- 500 ft-lbs of Torque
- Ergonomic Grip for Comfort
- F/R switch next to trigger for easy access

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA1076-XL 3/8" Drive Composite Stubby Impact Wrench

- 550 ft-lbs. of torque
- Jumbo hammer mechanism made of Triple Heat Treated Ni-Cr-Mo Alloy steel for ultimate reliability for power & durability
- Very Quiet - 85 dBA
- Patented trigger, handle & grip
- 2 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA1300-TH-A 3/8" Drive Composite Impact Wrench

- 500 ft-lb loosening torque
- Durable low weight composite housing
- "Super Clutch" Twin hammer design
- Patented quiet tuned exhaust (86 dBA)
- Patented ergonomically designed handle
- Patented easy operation flip lever forward and reverse
- 2 year warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA1355-XL 3/8" Drive NitroCat Impact Wrench

- 500 ft-lbs loosening torque; 200-400 ft-lbs working torque
- Twin Clutch Mechanism creates the strongest 3/8" impact in the marketplace
- Lightweight 2.7 ft-lbs
- Sound pressure level, dBA: 84

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA1375-XL 1/2" Drive NitroCat Mini Impact Wrench

- 700 ft-lbs loosening torque; 200-500 ft-lbs working torque
- Twin Clutch Mechanism - most powerful "mini" 1/2" impact in the market
- Lightweight: 2.7 lbs.
- Patented quiet technology only 85 dBA

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA1000TH 1/2" Drive Quiet Composite Impact Wrench

- Twin Hammer Clutch Mechanism
- 200-800 ft-lbs working torque
- 1,000 ft-lbs loosening torque (reverse)
- Lightweight, only 4.3 lbs.
- Ergonomically designed handle
- 90-120 PSI. Quiet - only 86 dBA
- Assembled in the U.S.A.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA1057-TH 1/2" Drive Super Compact Impact

- Only 3.85" long to get in small areas
- Weighs only 2.75 lbs
- 500 ft-lbs of Torque
- Ergonomic Grip for Comfort
- F/R switch next to trigger for easy access
- 2 yr warranty on material and workmanship w/ POP

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR IMPACT WRENCHES



ACA1178-VXL Vibrotherm Drive 1/2" Impact Wrench

- 1300 ft. lbs. of Loosening Torque
- 4.5 lbs. in weight
- Features a new "Patent Pending" impact mechanism, reducing vibration by 30% and increasing life by 50%
- The patented AIRCAT muffler produces AIRCAT'S characteristic low noise levels of between 82 d(B)A-85 d(B)A
- The patented AIRCAT Grip and VIBROTHERM DRIVE design deliver unmatched operator comfort and cosmetic styling



ACA1058-VXL Vibrotherm Drive 1/2" Compact Impact Wrench

- 550 ft/lb Maximum torque
- Weight 2.8 lbs
- Features a new "Patent Pending" impact mechanism, reducing vibration by 30% and increasing life by 50%
- The patented AIRCAT Grip and VIBROTHERM DRIVE design deliver unmatched operator comfort



EXCLUSIVE

ACA1431 1/2" Aluminum Impact Wrench

- 800 ft-lbs of torque
- 9000 RPM with 1600 impacts per minute
- Triple Heat treated Ni-Cr-Mo Alloy Steel Hammer mechanism and anvil for durability
- AIRCAT Ergonomic Comfort Grip
- Cross Bolt F/R and Power Management
- 2 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



EXCLUSIVE

ACA1431-2 1/2" Aluminum Impact Wrench with 2" Extended Anvil

- Grey Pneumatic Flip Socket size 19mm/21mm included
- 2 Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA1200K 1/2" Drive Kevlar® Composite Impact Wrench

- 1200 ft-lbs of loosening torque
- Durable Kevlar® composite body with ergonomically handle
- Hard hitting Twin Clutch Mechanism (solid, smooth impact on nut/bolt)
- Patented through-the-handle exhaust to keep debris away from face
- Kevlar® is a registered trademark of DuPont • 2 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



- ### ACA1200-KBR NitroCat Red Flame Impact Boot for 1200-K
- Black NitroCat Extreme logo
 - High durable cover
 - Protective boot
 - Impact wrench not included

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA1056-XL 1/2" Composite Stubby Impact Wrench

- 550 ft-lbs. of torque
- Composite housing weighs only 2.5 lbs.
- Jumbo hammer mechanism made of Triple Heat Treated Ni-Cr-Mo Alloy steel for ultimate reliability for power & durability
- Patented Silencing Technology - only 85 dBA
- Patented trigger and handle grip for comfort
- 2 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR IMPACT WRENCHES



ACA1250-K NitroCat® 1/2" Drive Kevlar Composite Impact Wrench

- Recommended for high torque applications
- 1,300 ft-lbs loosening torque
- Kevlar™ reinforced "body armor" housing
- Faster hard hitting impact (1,000 blows per minute)
- 2 year parts and labor warranty



Kevlar™ is a Trademark of the E.I. Du Pont Nemours and company and/or its assigns

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ACA1680-A 3/4" Xtreme Duty Impact Wrench

- 1600 ft-lb Maximum torque
- Triple heat treated Ni-Cr-Mo alloy steel hammer mechanism
- Hard hitting twin hammer mechanism
- Patented "silencing technology" reduces the noise level to 89 dBA
- Patented ergonomic handle
- 2 yr warranty on material and workmanship w/ POP



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ACA1600-TH-A 3/4" Drive Composite Impact Wrench

- Upgrade to the 1600-TH
- Increased power from 1400 to 1600 maximum torque
- 2 year warranty



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ACA1770-XL 3/4" Super Duty Composite Impact Wrench

- 1400 ft-lb Maximum torque
- Low weight composite housing
- Twin hammer increases blow frequency and efficiency and reduces wear
- Ergonomically designed grip and trigger
- Power management switch with three power settings
- 2 year warranty on material and workmanship



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA1778-VXL Vibrotherm Drive 3/4" Impact Wrench

- 1700 ft. lbs. of Loosening Torque
- 7.5 lbs. in weight
- AIRCAT VIBROTHERM DRIVE features a new "Patent Pending" impact mechanism, reducing vibration by 30% and increasing life by 50%
- Patented AIRCAT muffler
- Patented AIRCAT Grip and VIBROTHERM DRIVE design



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ACA1991 1" Low Weight Extended Impact Wrench

- 2,100 ft-lb maximum torque
- Exhaust can be located at the top or bottom of the tool
- Features rubber handle grips and rubberized trigger inserts for ultimate comfort
- Combined friction ring and through hole socket retainers
- 2 year warranty on material and workmanship



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ACA1992 1" Impact Wrench with 8" Extended Anvil

- 1800 ft-lbs of torque at 5000 RPM producing 1600 impacts per minute
- Pinless Hammer Mechanism
- Triple heat treated Ni-Cr-Mo Alloy Steel for durability
- Enlarged D handle can be located on either side of tool
- Combined F/R and Power Management Switch



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ACA1994 1" Super Duty Impact Wrench with 8" Extended Anvil

- 2,300 ft-lb Maximum torque
- Durable brushed aluminum motor housing
- Pinless Hammer Mechanism
- Rugged construction with reliable bolt-on assist handle
- 2 yr warranty on material and workmanship w/ POP



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



ACA1890-P 1" Pistol "Two Jaw" Impact Wrench



- 2000 ft-lbs of Torque
- Two jaw clutch mechanism provides unparalleled torque output and lasts longer than other impact mechanisms
- Low CFM usage compared to other 1" Impacts - 6.1 average CFM
- Patented AIRCAT grip for comfort
- Low noise - only 89 dBA
- 2 Year Warranty



ACA1870-P 1" Low Weight Pistol Grip Impact Wrench

- 2,100 ft/lbs maximum torque
- Twin hammer impact mechanism
- Low weight impact resistant housing
- Features combined friction ring and through hole socket retainers



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SPJSP-7150-V8 3/4" Composite Impact Wrench

- 1,100 ft./lb. max torque, higher torque for stubborn fasteners
- Twin hammer mechanism is durable and hard hitting using fewer parts and less down time
- 4 speed positions control gives more control when tightening fasteners, full power reverse for easier removing of fasteners
- Convenient SAS (side and side) system offers forward/reverse for one hand operation
- Made in Japan



JSC380-12 3/8" Anvil Retainer Clip and O-Ring Kit, 12 Pack

- Each pack contains 3 retainer clips and 3 O-rings
- Made in USA



SUNEX[®] TOOLS

SUNSX231P 1/2" Drive Premium Impact Wrench

- 500 ft-lbs of max. torque
- Superior anvil constructed of special alloy lasts 33X longer than average
- Reverse bias technology increases torque
- Free Speed 7,000 rpm; average air consumption: 7.0 CFM; air pressure 90 PSI; air inlet: 1/4"; sound: 107 dBA
- Dimensions: length 7.4"; weight 5.9 lbs



SUNSXMC38 3/8" Drive Super Duty Mini Impact Wrench with Grip

- Powerful 550 ft-lbs motor
- Lightweight aluminum housing
- Compact design ideal for tight spaces
- Unique one hand forward/reverse control



SUNSXMC12 1/2" Drive Super Duty Mini Impact Wrench with Grip

- Warranty: 2 Year



SUNSX4360-6 1" Drive Lightweight Super Duty Impact Wrench with 6" Anvil

- Weighs only 15.9 lbs with 1,600 ft-lbs of torque
- Unique ergonomic sway back handle to reduce back fatigue
- Three positions forward
- Inlet has two options depending on operator preference
- 2 year warranty



SUNSX556-6 1" Drive Impact Wrench with 6" Extended Anvil

- 1,600 ft-lbs. of torque
- Only 24.5 lbs. of weight, lightest in its class
- Lower vibration and long last operation
- Three forward and three reverse speeds



NUTRUNNERS



**Chicago
Pneumatic**

When truck and bus wheels are mounted and tightened properly, it ensures the safety of drivers and passengers, and can reduce road accidents. Chicago Pneumatic's BlueTork CP7600 nutrunner series is a reliable and ergonomically designed tool, that offers a unique torque control solution. The BlueTork nutrunner can tighten wheel nuts to a precise specification without using impact force. It is the only non-impact tool with a shut-off nutrunner available on the market for fleet maintenance applications.

All 1" BlueTork CP7600 series nutrunners feature:

- Almost no vibration : less 2,5 m/s²
- Accurate torque (+/-5%) • Low noise level: 79 dB(A)



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7600XB-R
1" BlueTork Nutrunner
with One Torque Preset and Reversible

- Air Shut-off clutch at preset torque
- Integrated reaction bar standard with blade



CPT7600XB
1" BlueTork Nutrunner
with One Torque Preset

- Air Shut-off clutch at preset torque
- Integrated reaction bar standard with blade



CPT7600C-R
1" BlueTork Pistol Grip Pneumatic Nutrunner

- Short version with CUPS reaction bar in option
- Integrated reaction bar standard with blade
- Air Shut-off clutch at preset torque



CPT7600C-R4P
1" BlueTork 4 Piston Nutrunner with Reverse

- Short version with CUPS reaction bar in option
- Selection up to 4 calibrated tightening torques
- Air Shut-off clutch at preset torque



CPT7600XC-R
1" BlueTork Extended Nutrunner
with Single Torq Reaction Cup

- Air Shut-off clutch at preset torque
- Integrated reaction bar standard with blade
- Extended version with included spring load cup reaction bar



CPT7600XC-R4P
1" BlueTork Extended Version
with 4 Postions and Reaction Cup

- Selection of up to 4 calibrated tightening torques
- Extended version with included spring load cup reaction bar • Air Shut-off clutch at preset torque

AIR RATCHETS



IRT1105MAX-D2

1/4" Drive MAX Series Mini Air Ratchet

- 30 ft-lb max torque, 300 rpm free speed
- Variable-speed regulator
- Ergonomic coupling nut and composite handle ensure operator comfort
- Nickel-plated housing provides enhanced corrosion resistance

IRT1105MAX-D3

3/8" Drive MAX Series Mini Air Ratchet

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT1207MAX-D3

3/8" Drive Premium Air Ratchet

- 65 ft-lbs of maximum torque
- Patent-pending forward/reverse collar provides unrestricted access to easily change the direction of the tool

IRT1207MAX-D4

1/2" Drive Premium Air Ratchet

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT105-D2

1/4" Drive Air Ratchet

- 25 ft-lb max torque, 250 rpm free speed
- Low-profile forward/reverse control
- Ergonomic coupling nut and handle

IRT105-D3

3/8" Drive Mini Air Ratchet

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT107XPA

3/8" Drive Air Ratchet

- 54 ft-lbs of maximum torque
- Variable speed lever-style throttle
- 360° adjustable exhaust directs air away from the operator and the work

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT109XPA

3/8" Drive Super Duty Air Ratchet

- 76 ft-lbs (103 Nm) maximum torque at 220 rpm free speed
- Variable speed button trigger
- 360° adjustable exhaust directs air away from the operator and the work
- Optimized gear ratio and airflow for extra performance

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2015MAX

3/8" Drive Low Profile Hammerhead Impactool Air Ratchet

- 180 ft-lb max torque and 7,000 rpm
- A feather-touch trigger, two-position forward power regulator, and conveniently located forward/reverse ring
- A head height of under 2" allows you to safely use in tight spaces
- Knuckle-saver reactionless torque eliminates kickback

IRT2025MAX

1/2" Drive Low Profile Hammerhead Impactool Air Ratchet

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT1099XPA

1/2" Drive Super Duty Air Ratchet

- 76 ft-lb (103 Nm) maximum torque at 220 RPM free speed
- Exclusive IR TwinPawl Plus head design for exceptional durability
- Variable speed button trigger
- 360° adjustable exhaust directs air away from the operator and the work

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SPJSP-7730

3/8" Reaction Free High Speed Impact Ratchet

- Reaction free while still providing high speed and high torque
- Max torque: 100 ft-lbs. 450 rpm
- Durable and high quality construction expertly made in Japan
- 360° rotating rear exhaust deflector
- Single dog clutch impact mechanism



SPJSP-7265W

3/8" Wobble Anvil Sealed Flat Head Mini Ratchet

- Lightweight and patented sealed head
- One-handed operation for the forward and reverse lever
- 360° exhaust sleeve allows user to point away exhaust
- Durable and high quality construction expertly made in Japan
- Overall length is only 8" and weight only 1.5 lbs.



SPJSP-7265

3/8" Sealed Flat Head Mini Ratchet

- Lightweight and patented sealed head
- One-handed operation for the forward and reverse lever
- 360° exhaust sleeve allows user to point away exhaust
- Durable and high quality construction expertly made in Japan
- Has an adjustable 4-25 ft-lbs of torque
- Overall length is 8" and weight is only 1.5 lbs.

AIR RATCHETS



SPJSP-7250H 1/4" Drive Low Profile Hex Bit Driver

- Low profile for use in tight areas
- Use with any 1/4" drive bit
- Ratchet style for ease of use
- 360 degree exhaust sleeve
- Reverse lever for one-handed operation



SPJSP-7260 1/4" Sealed Flat Head Mini Ratchet

- Lightweight sealed head for long life
- Has an adjustable 4-25ft lbs. of torque
- One handed operation for the forward and reverse lever
- 360° exhaust sleeve allows user to point away exhaust
- Durable and high quality construction expertly made in Japan
- Overall length is 8" and weight is only 1.5 lbs



SPJSP-7786FLUK 3/8" Heavy-Duty Sealed Flat Head Ratchet with Folding Lock-Back Utility Knife

- High Power: 80 ft. lbs.
- Reverse lever for one-handed operation
- Sealed flat head for long life
- Durable, high quality construction expertly made in Japan
- Folding lock-back utility knife included



SPJSP-7787 1/2" Heavy Duty Sealed Flat Head Ratchet

- Powerful 80 ft-lbs. of torque
- Free speed of 250 rpm
- Reverse lever for one-handed operation
- Sealed flat head for long life
- 360° exhaust sleeve



Scan Code to
view video



SPJSP-1764 1/4" Super Fast Mini Impact Ratchet

- High speed (500 rpm), high power (50 ft-lbs), reaction free
- A patented reaction-free impact mechanism helps minimize damage to the user's wrist and knuckles
- Compact size to safely and efficiently reach tight spaces



Scan Code to
view video



SPJSP-1765 3/8" Super Fast Mini Impact Ratchet

- High speed (500 rpm), high power (55 ft-lbs), reaction free
- A patented reaction-free impact mechanism helps minimize damage to the user's wrist and knuckles
- Durable and high quality construction expertly made in Japan
- Compact size to safely and efficiently reach tight spaces



KT182500A 1/4" Drive Air Ratchet

- 25 ft-lbs ultimate torque • 250 rpm
- 2 cfm air consumption
- 7" overall length
- 90 PSI air pressure (recommended)



KT182503A 3/8" Drive Air Ratchet

- 50 ft-lbs ultimate torque • 170 rpm
- 10" overall length
- 6 cfm air consumption, 90 PSI air pressure (recommended)



KT182504 3/8" Drive Heavy Duty Air Ratchet

- 55 ft-lbs ultimate torque
- 11" overall length • 170 rpm
- 6 cfm air consumption, 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm -
www.P65Warnings.ca.gov



SUNSX113 3/8" Drive Air Ratchet

- 45 ft-lbs of torque and 150 rpm
- Torque: 45 ft-lbs
- Free speed: 150 rpm
- Average air consumption: 4 cfm
- Sound Level: 110 dBA
- Air inlet thread size (NPTF): 1/4"
- Min. hose size (I.D.): 3/8

AIR RATCHETS



**Chicago
Pneumatic**



CPT828

3/8" Drive Heavy Duty Ratchet

- Anti-slip head design
- Efficient 1/2 hp motor and triple idler planetary gear system provide up to 50 ft-lbs of torque
- Teasing throttle
- Specifications: cfm - 4, hose size - 3/8", torque range - 10 to 50 ft-lbs, ultimate torque by hand - 125 ft-lbs, speed - 150 rpm

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7829

3/8" Composite Ratchet

- Powerful: 70 ft-lbs. breakaway torque
- 225 RPM
- Advanced motor, full caged gear, and head design
- Adjustable side exhaust avoids blowing dirt and dust
- Compact: only 10.7 / 272mm long and weighs just 2.6 lbs.

CPT7829H

1/2" Drive Composite Ratchet

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA800

1/4" Drive "Mini" Composite Single Pawl Ratchet

- 35 ft-lb Maximum torque
- Fast rundown 320 RPM
- Patented quiet tuned exhaust (82 dBA)
- Feather trigger for control
- Ergonomically designed housing

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA804

1/4" Mini Ratchet

- 30 ft-lbs of torque
- 280 rpm
- Unique single-piece housing/ratchet head increases durability and eliminates head spreading
- Ergonomic composite over mold grip for comfort
- 2 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA808-15-25

1/4" Drive Long Reach Ratchet

- 15.3" long for hard to reach fasteners
- 30 ft-lbs of torque
- 1/4" drive is most requested anvil size
- Exclusive AIRCAT design
- Additional support bearings provide reliability



ACA801

3/8" Drive Mini Composite Air Ratchet

- 35 ft-lbs of torque in a compact size
- Very fast - 320 RPM
- Feather Trigger for Control

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA802

3/8" Drive Composite Ratchet

- 70 ft-lbs of torque
- Very fast - 280 RPM
- Feather Trigger for ultimate control

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA809-SH

3/8" Flat Head Ratchet

- Low profile flat head allows better access to confined work areas
- Sealed head design for increased durability and reliability
- Convenient and comfortable trigger operation
- Easy to access F/R switch
- 360 degree adjustable exhaust



ACA806

3/8" Drive High Performance Air Ratchet

- 80 ft-lbs of torque at 200 RPM
- Enlarged ratchet head provides reliability
- 360° Rotational exhaust for safety
- Unique variable throttle
- Soft Touch coated handle grip for operator comfort
- 2 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA805-HT

3/8" High Torque Ratchet

- 130 ft-lbs of torque
- Latest design eliminates "head spreading"
- Ergonomically designed contour handle and trigger
- Variable speed trigger; only 84 dBA
- 2 year warranty

**SILENT
POWER**

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR RATCHETS



ACA807 3/8" Mini Composite Palm Ratchet

- Only 5.4" long for tight areas
- 35 ft-lbs of Torque
- Very fast - 300 RPM

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA808-15 3/8" Drive, 15" Extended Length Ratchet

- 15" extended ratchet to reach hard to get areas
- 30 ft-lbs of torque • Very fast 200 RPM
- Weighs 3.1 LB • 2-year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA808-22 3/8" Drive, 22" Extended Length Ratchet

- 22" long to reach hard to get fasteners
- 65 ft-lbs of torque at 160 RPM
- Weighs 4.3 LB • 2-year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA805-HT-5 1/2" Drive High Torque Ratchet

- 130 ft-lbs. of max torque • 180 RPM
- Ergonomic composite handle for comfort
- 360° rotational exhaust and needle bearing construction
- Weighs 3.25 lbs. and 12.5" long • 2 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA809-SH-5

1/2" Drive Sealed Flat Head Ratchet

- Low profile flat head allows better access to confined work areas
- Sealed head design for increased durability and reliability
- Convenient and comfortable trigger operation
- Easy to access F/R switch
- 360 degree adjustable exhaust



ACA802-5

1/2" Quiet Composite Ratchet

- 70 ft-lbs of torque • 280 RPM
- Patented Silencing Technology reduces noise to 85 dBA
- Includes ratchet cover to prevent ratchet head contamination
- Twin pawl mechanism for durability • 2 year warranty
- Ergonomic trigger and composite handle for comfort

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR DRILLS



KT184218

3/8" Air Drill

- 2,200 rpm • 3/8" keyed chuck
- 3/8"-24 spindle
- Ball and needle bearing spindle component support and machined planetary gearing

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT184228A

3/8" Reversible Air Drill

- Chuck Size: 3/8"; Recommended Air Pressure: 90 PSI; Average Air Consumption: 4 CFM
- Hose Size: 3/8" (10mm); Spindle Thread: 3/8"-24; Air Inlet: 1/4"
- Reversible Motor
- Ergonomic Handle
- Covered by a 1 Year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT184229

1/2" Heavy-Duty Reversible Drill

- 800 rpm • 1/2" keyed chuck
- Reversible • Trigger Speed Control
- Handle exhaust • 4 CFM
- Ball and needle bearing spindle component support

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SPJSP-7527KL

1/2" Composite Air Drill, Keyless Chuck

- Lightweight, durable 2.9 pounds with composite body
- Double gear mechanism with free speed of 400 rpm
- Side and side system for one hand operation of forward and reverse
- Air exhaust with muffler at base of handle



CPT789HR

1/2" Chuck Super Duty Reversible Air Drill

- Free speed: 500 RPM • Handle exhaust
- Teasing throttle for precise control
- Needle bearing gearing

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT9287C

3/8" Keyless Drill

- Reverse lever on top
- Large teasing trigger and progressive valve
- Composite housing
- Powerful 0.6 HP motor

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA4337

3/8" Drive Reversible Angle Drill

- Powerful .75 HP motor
- Conveniently located F/R knob
- Built-in speed regulator
- Composite ergonomic grip
- Rear exhaust and quiet - only 75dBA



ACA4338

3/8" Drive Reversible Red Composite Drill

- Free Speed: 1800 rpm
- Includes Jacobs chuck
- Quiet Technology 85 dBA
- Lightweight only 2.6 lbs.
- Ergonomical handle design
- 1 year warranty on material and workmanship

ACA4450

1/2" Drive Reversible Red Composite Drill

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT7802RAKC

3/8" Heavy Duty Air Reversible Drill with Keyless Chuck

- Free speed: 2,000 rpm
- Variable speed throttle
- Reversible motor with a quick reverse lever • Keyless chuck

IRT7803RAKC

1/2" Heavy Duty Air Reversible Drill with Keyless Chuck

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR HAMMERS



IRT122MAXK Short Barrel Air Hammer Kit - Low Vibration

- 3,500 blows per minute
- Quick change retainer,
(5) chisels and carry case included

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT122MAX Short Barrel Air Hammer - Low Vibration - Tool Only

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT118MAXK Long Barrel Air Hammer Kit - Low Vibration

- Anti-vibration feature reduces vibration by 30% over standard air hammers
- 15% increase in impact force over standard air hammers
- Quick-change retainer allows for faster chisel changeovers
- 2,500 blows per minute
- Quick change retainer, (5) chisels and carry case included

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT118MAX Long Barrel Air Hammer - Low Vibration - Tool Only

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT121 Super Duty Air Hammer

- Professional touch trigger for total control
- Long-life tool with a tough one-piece alloy barrel
- Easy to maintain, with an "easy out" throttle valve assembly
- 3,000 blows per minute
- 1 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT115 Standard Duty Air Hammer

- Up to 5,000 blows per minute
- Alloyed steel barrel and heat-treated piston
- Built-in power regulator and trigger control
- 1 year warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT117 Standard Duty Air Hammer

- Up to 2,000 blows per minute

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7110K Heavy Duty Air Hammer Kit

- Shank: .401
- Vibration isolation system for smoother operation
- Average air consumption: 3.65 cfm
- Cushioned exhaust deflector on barrel for comfort and control
- Touch trigger for precision start ups and total control
- Kit includes: (1) quick change retainer, (4) chisels



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT717K Air Hammer Kit

The CP717K is a Super Duty Air Hammer Kit which includes the CP717, a 4 piece .498 chisel set and a spring style retainer all packed in a heavy duty carry case.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR HAMMERS



**Chicago
Pneumatic**

CPT7160

Low Vibration and Lightweight Short Air Hammer

- .401 Round Shank
- Durable Aluminum motor housing
- 3,500 Blows Per Minute
- Offering 4 adjustable power settings
- Well balanced tool with rubber gripping



CPT7160K

Low Vibration Short Hammer Kit

- Kit contains Bare Tool, Quick Change Retainer, Spring Retainer, Mini Oiler, 5 Piece Chisel Set and Soft Bag



**Chicago
Pneumatic**

CPT7165

Low Vibration and Lightweight Long Hammer

- .401 Round Shank
- Durable Aluminum motor housing
- 2,500 Blow Per Minute
- Offering 4 adjustable power settings
- Well balanced tool with rubber gripping



CPT7165K

Low Vibration Long Hammer Kit

- Kit contains Bare Tool, Quick Change Retainer, Spring Retainer, Mini Oiler, 5 Piece Chisel Set and Soft Bag



ACA5100-A

Medium Stroke Air Hammer Kit

- 3000 Blows Per Minute
- Patented Ergonomic Comfort Grip
- Patented Silencing Technology
- Includes 5 Chisels and 2 Chucks
- Low Vibration only 4.2m/s²
- 2 Year Warranty



ACA5200-A-T

Long Stroke Air Hammer

- Very Low Vibration only 4.2m/s²
- Patented AIRCAT Handle Grip for comfort and control
- Quick Change Chisel Retainer
- 3.87" Piston Stroke producing 2200 BPM
- 2 Year Warranty



ACA5300-A-T

Heavy Duty Industrial Grade Air Hammer .498 Shank Opening

- Patented AIRCAT Ergonomic Composite Handle Grip
- 2.8" Piston Stroke
- Quick Change Chisel Retainer to prevent by-pass
- 2 Year Warranty



ACA5300-A

Super Duty Air Hammer

- 2-11/16" Piston stroke
- 1,760 Blows per minute
- Multi-patented muffler/exhaust system for extremely low noise and vibration level
- Heavy Duty ball lock quick change chisel retainer
- 2 year warranty on material and workmanship



KT183275

Regulated Air Hammer

- Independent power regulators and teasing throttle
- Hardened alloy steel barrel
- 3500 BPM; 2-5/8" stroke; 3/4" bore; 6-3/4" length; 3.5 lbs; 4 cfm
- Standard .401" shank opening



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

KT183277

Regulated Long Air Hammer

- 2000 BPM



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR CHISELS



GRECS807

7 Piece Heavy-Duty Chisel Set - .498 Shank

- Contains the most popular .498 shank chisels
- Made of highest quality steel for use with pneumatic hammers
- Black oxide coated for resistance against rust and corrosion
- Heat treated for strength and durability



GRECS110

10 Piece General Service Chisel Set - .401 Shank

- Contains the most popular .401 shank chisels to handle a wide variety of job types
- All chisels are made from the highest quality steel finished with a black oxide coating for exceptional quality and durability
- Lifetime warranty



Set includes: Rivet cutter, 3/4" flat chisel, straight punch, tapered punch, panel cutter, bushing splitter, muffler cutter, 5/16" nut splitter, dual blade panel cutter and 1" hammer.

AIR CHISEL OPEN STOCK

TYPE	OLD FORGE	S & G TOOL AID	K TOOL	MAYHEW	GREY PNEUMATIC
Cold chisel	OLD1972 (6") OLD1973 (8") OLD1974 (10")		KTi81972		
Tapered punch	OLD1979 (6")		KTi81979 (3/8")		
Flat chisel		SGT91400 (7")			GRECH105 (18")
Ball joint separators			KTi81996		
Claw ripper		SGT91250			
Cold chisel	OLD1986 (18")	SGT91900 (10.5")	KTi81973 (8") KTi81974 (10") KTi81986 (18")		
Double cut body ripper		SGT91350	KTi81956		
Hammer		SGT91125	KTi81982 (Long Hammer)		
Long scraper	OLD2010				
Long taper punch	OLD2011				
Rivet and bolt cutter	OLD1975	SGT91500	KTi81975		
Scraper		SGT91150	KTi81976		
Sharp point long taper punch	OLD2012				
Sheet metal trimmer	OLD1959		KTi81959		
Slotted panel cutter	OLD1958		KTi81958		
Spotweld breaker	OLD1960				
Tail pipe cutter	OLD1968	SGT91050	KTi81968		
Tapered punch	OLD1997 OLD1978 (18") OLD1980 (1/2")	SGT91450	KTi81997 (1/8") KTi81977 (Sharp Point) KTi81979 (3/8")		
Tie rod separators			KTi81995		
Wide blade scraper	OLD1970				
Pneumatic hammer				MAY32001 (12") MAY32002 (18") MAY32003 (24")	
Air separator	OLD1976				
Beehive retaining spring			KTi83091		
Safety bit retainer			KTi83092		
Heavy duty quick-change retainer			KTi83093		
Needle scaler attachment			KTi83090		
Pneumatic Bit Set			KTi81900		

AIR DIE GRINDERS



IRT301BK General Purpose Air Angle Die Grinder Kit - 0.25HP

- Delivers 0.25 HP (0.19kW) at 21,000 rpm free speed
- Durable ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Strong aluminum housing withstands tough operating conditions
- Front exhaust helps keep work surface clean
- Kit includes: 10 mounted grinding tips, Blow-molded case

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT307BK Straight Die Grinder Kit - 0.25HP

- Delivers 0.25 HP (0.19 kW) at 28,000 rpm free speed
- Integral safety-lock throttle lever prevents accidental start up
- Strong aluminum housing withstands tough operating conditions
- Front exhaust
- Ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Kit includes: 10 mounted grinding tips, Blow-molded case

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT308BK Straight Die Grinder Kit - 0.33HP

- Delivers 0.33 HP (0.25 kW) and 25,000 rpm free speed
- Lightweight, ergonomic composite housing
- Integral safety-lock throttle lever prevents accidental start up
- Rear exhaust directs air away from the operator
- 1 year warranty on material and workmanship
- Kit includes: 4 burrs.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT5102MAX Angle Die Grinder - Premium

- MAX Power — 0.4 hp and 20,000 rpm motor delivers the power you need for the toughest jobs
- MAX Performance — Spindle lock feature allows for faster abrasive changeovers and optimal lube free design eliminates oil contamination in the work environment
- MAX Comfort — Enhanced grip design and low-profile throttle reduces hand fatigue
- Composite grip design prevents “freezing”

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT301B Angle Die Grinder

- Powerful motor with precision gearing offers 0.25 HP at 21,000 rpm free speed
- Durable ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Strong aluminum housing withstands tough operating conditions
- Front exhaust helps keep work surface clean
- Tool comes with 1/4" and 6 mm collets and two wrenches

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT307B Straight Die Grinder

- Powerful motor delivers .25 HP at 28,000 rpm free speed
- Durable ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Strong aluminum housing withstands tough operating conditions
- Small and lightweight design provides easy operation greater access to tight spots
- Includes 1/4" and 6 mm collets and two wrenches

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT409 0.5 HP Straight Air Die Grinder

- Power: The 0.5 HP 4-vane motor delivers the power you need to tackle many applications from smoothing and polishing to deburring, and its front exhaust helps keep your work surfaces clean
- Durability: The durable aluminum housing protects the 409 Air Die Grinder in tough conditions
- Free speed - 27,000 rpm • 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR DIE GRINDERS



IRT308B Straight Die Grinder with Composite Housing

- Powerful motor delivers .33 HP and 25,000 rpm free speed
- Lightweight, ergonomic composite housing helps prevent "freezing" and offers greater operator comfort
- Integral safety-lock throttle lever prevent accidental start up
- Rear exhaust directs air away from the operator
- Tool comes with 1/4" and 6 mm collets and two wrenches

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT5108MAX Straight Die Grinder - Premium

- MAX Power — 0.4 hp and 25,000 rpm motor delivers the power you need for the toughest jobs
- MAX Performance — Optimal lube free design eliminates oil contamination in the work environment
- MAX Comfort — Enhanced grip design and low-profile reduces hand fatigue
- Composite grip design prevents "freezing"
- Industrial grade performance

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT302B Angle Die Grinder with Composite Housing

- Powerful motor delivers 0.33 HP 20,000 rpm free speed
- Durable ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Lightweight, ergonomic composite housing prevents "freezing" and offers greater operator comfort
- Rear exhaust directs air away from the operator
- Tool comes with 1/4" and 6 mm collets and two wrenches

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT345MAX 5" Wheel Heavy Duty Air Angle Grinder

- Featuring a mighty 0.88 horsepower motor this grinder has a best-in-class power-to-weight ratio
- MAX safety: Internal to the tool is a governor, a device used to prevent an over-speed condition and to maximize the speed of the tool while under load, protecting the operator during use
- Built-in lubricating wick optimizes the life of the angle gear set

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

REPAIR PARTS



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR TOOL REPAIR PARTS AND KITS

Part#	Tool Type
CPTCA094885	CPT734 ring
IRT107-TK1	IRT107 ratchet head repair kit
IRT109-TK1	IRT 109 ratchet head repair kit
IRT2135-TK2	IRT2135 tune-up kit
IRT231-425A	IRT231c retaining ring
IRT231-638-10	IRT231 cap screw

AIR TOOL REPAIR PARTS AND KITS

Part#	Tool Type
IRT231-665-10	IRT231 screw pack
IRT231-666	IRT231 knob
IRT231-706	IRT231 washer
IRT231B-A626	IRT231 anvil for IRT231c, IRT2135ti, & IRT232tgsi
IRT231P32	IRT231c cover
IRT231-TK2	IRT231 motor tune-up kit (includes bearings)
IRT231-TK3	IRT231 motor tune-up kit
IRT261P32	IRT261 cover

AIR DIE GRINDERS



ACA6201

Straight Die Grinder

- Patented quiet technology (85 decibels)
- Great tool to get in the tight spots
- Direct gear mechanism
- Superior internal mechanics
- Patented ergonomically red designed handle

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA6260

Composite 1.0 HP Straight Die Grinder

- 20,000 RPM • Quiet 89 dBA • Rear exhaust
- Full 1 HP motor to prevent stalling
- Composite housing with ergonomic trigger and grip
- Very low vibration 2.5m/sec² • 2 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA6200

Mini Die Grinder

- Can be used in tight spots • Sound level is 95 dBA
- Free speed is 22,000 revolutions per minute
- Average consumption is 4 cubic feet per minute

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA6210

Extended Shank Straight Die Grinder

- 22,000 (rpm) Free Speed • Direct Gear Mechanism
- Sound Level dBA: 82 • Ergonomically designed handle
- 1 year warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA6270

1 HP Extended Die Grinder

- 1 HP motor prevents stalling
- 6" extension for hard to reach areas
- Ergonomic, composite grip and trigger for user comfort
- Rear exhaust keeps debris away from work area and operator
- Very quiet with low vibration



ACA6290

.75 HP Reversible Die Grinder

- Spindle lock feature for easy accessory change
- Erickson® style precision collet
- .75 HP non stall motor
- Composite handle and grip for comfort

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA6255

1/4" Drive Composite Angle Die Grinder

- Superior steel grade internal bevel gears for longer life
- Feather trigger for better speed control
- Patented quiet technology (82 dBA)
- Ergonomically designed housing
- Motor (HP): 1/2 • Exhaust: Rear
- Free Speed (RPM): 20,000

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA6280

.75 HP Angle Die Grinder with Spindle Lock

- .75 HP non stall motor
- Erickson® style precision collet
- Spindle lock feature for easy accessory change
- Composite handle and grip for comfort

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA6265

1 HP Angle Die Grinder

- Rear exhaust keeps debris from work area and operator
- Ergonomic, composite grip and trigger
- Very quiet with low vibration
- Precision bevel gears for reliability

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA6340

4-1/2" Angle Grinder

- 1HP motor eliminates "stall" and increases reliability
- Spindle lock for ease of wheel change
- Multi positional rotational guard improves access
- Hi-Low speed adjustment control
- Composite grip and throttle have been ergonomically designed to provide unmatched comfort for the user

AIR DIE GRINDERS



ACA6380

2.3 HP Heavy Duty 5" Angle Grinder

- Super powerful 2.3 HP Motor
- Spindle lock for easy wheel change
- Ergonomically designed composite grip for operator comfort
- Low vibration and rear exhaust for user safety
- 2 Year Warranty



**Chicago
Pneumatic**



CPT9108Q-B

Mini Die Grinder, 23000 RPM

- 0.32 hp (240W) motor
- Low noise level: only 81 dB(A)
- Built-in air regulator
- Includes 1/4" and 6 mm collets
- 23,000 rpm
- Rubber overmold grip
- Swivel air inlet
- Rear exhaust

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT9106Q-B

Compact 90° Angle Die Grinder

- 1/4" and 6mm collets included
- Efficient and powerful 0.32 hp motor
- Low noise level: 80dB(A)
- 23,000 rpm free speed
- Built-in air regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT872

Standard Duty Air Die Grinder

- Free speed: 27,000 RPM
- Adjustable power regulator for precise control
- Lock off throttle to prevent accidental start up
- Rear exhaust

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT876

Mini Air Die Grinder

- Free speed: 30,000 rpm
- Compact, lightweight design
- Lock off throttle to prevent accidental start up
- Complete with 1/4" and 6mm collet
- Built-in regulator



KT187132A

1/4" Mini Air Die Grinder

- Compact, lightweight design
- Lock off throttle to prevent accidental start up
- Free Speed: 25000 RPM; Collet and Air Inlet Size: 1/4"; Hose size: 3/8" ID; Recommended Air Pressure: 90 PSI
- Covered by a 1 Year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT187125

Mini Rear Exhaust Die Grinder

- 25,000 rpm • 1/4" collet • 2 cfm air consumption
- Features full bearing support air motor, rear exhaust independent power regulator and variable speed throttle

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT187126A

1/4" Mini Angle Die Grinder

- Collet Size: 1/4"; Inlet Threaded 1/4" NPT; Hose Size: 3/8" ID; Free Speed: 22,000 RPM; Recommended Air Pressure: 90 PSI; Average Air Consumption: 4 CFM
- Right angle head allows easier working within confined area
- Built-in power regulator allows precise control of the speed
- Rear air exhaust helps blow exhaust away from work surface
- Covered by a 1 Year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT187128

Gearless Angle Die Grinder

- 25,000 rpm • 1/4" collet
- 4 cfm air consumption

Tool features drop-in motor, rear exhaust and enhanced muffler system. Lightweight, thermally insulated composite housing reduces vibration. Hardened steel cylinder maximizes air utilization. Grinder's 1/4" collet accepts 1/8", 1/4", 3mm and 6mm shanks.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SPJSP-1900

1/8" Micro Grinder

- Features a soft grip, a rear exhaust, and a flexible 59" hose
- The Micro Grinder can reach a free speed of 70,000 rpm and has an air consumption rate of 0.7 cfm
- 5.5" long (without the hose) and 0.67" wide

AIR DIE GRINDERS

SUNEX®
T O O L S

SUNSX5210

1/4" 1.0HP

Super Duty Die Grinder

- Erickson industrial collet
- Quick set easy release
- Composite housing for lightweight durability
- 20,000 rpm of speed to get the job done quickly
- 2 year limited warranty



SUNEX®
T O O L S

SUNSX5206

1/4" 0.5HP

Angled Die Grinder

- Powerful 0.5hp motor
- 1/4" collet
- Composite housing for comfort during long usage
- Speed control dial for adjusting tool speed
- Auto-set easy release
- 2 year limited warranty



Astro



AST1221

Die Grinder Kit and 8 Piece Rotary Burr Set

- Blue composite body 1/4" Angle Die Grinder, front exhaust
- Blue composite body 1/4" Mini Die Grinder, front exhaust
- 8-piece double cut carbide rotary burr set, 1/4" shank
- Grinders have composite handles that reduce vibration; with rib texture that provides a firm grip
- Grinders have lever throttle for feathering control and built-in regulators

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST219

3 Piece Die Grinder Kit (AST201, AST204 and AST2181)

- AST201 - Composite body 1/4" die grinder with 25,000 rpm
- AST204 - Composite body 1/4" 90° angle die grinder with 20,000 rpm
- AST2181 - 8 piece double cut carbide rotary burr set
- Both die grinders feature rear exhaust and lever throttles
- Burr set includes (in a blow molded case)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Astro



AST1222

Heavy Duty 1/4" Angle Head Die Grinder and Standard Duty 1/4" Die Grinder Set

- Composite handles reduce vibration and provides a firm grip
- Lever throttle for feathering control
- Built-in regulators

This set includes the AST1240 - Blue composite body 1/4" 90° Angle Die Grinder and the AST1206A - Composite body 1/4" Medium Die Grinder.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST2181B

1/4" Die Grinder and 8 Piece Burr Set Combo

- AST202 - composite body 1/4" medium die grinder - 22,000 rpm - rear exhaust air flow system
- AST2181- 8-piece double cut carbide rotary burr set

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AST533ET

Pinstripe Removal Tool with Aluminum Body

- Developed for the removal of pinstripes, adhesive, double faced tape and molding with Astro's Smart Eraser® Pad
- Geared at 4,000 RPM
- Spanner wrenches included for easy removal of pad



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR DIE GRINDERS

Dynabrade® Nitro Series 0.3 HP Die Grinders

- Compact, lightweight contemporary tool design permits easy access to tight areas
- Thermoplastic rubber tool grip reduces cold air transmission and absorbs vibration
- Includes safety-lock lever; rotational rear exhaust to direct away from operator • Smooth, efficient air motor



RIGHT ANGLE DIE GRINDERS

Part Number	Collet Insert	Sound Level	Max Air Flow SCFM (L/Min)	Hose Size Inch (mm)	Air Inlet Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
DYBDGR31	1/4"	86 dB(A)	18 (510)	3/8 (10)	1/4" NPT	1.2 (.54)	6.5 (165)	1.6 (41)
DYBDGR51	1/4"	86 dB(A)	26 (736)	3/8 (10)	1/4" NPT	1.6 (.73)	7.1 (180)	1.8 (46)

STRAIGHT-LINE DIE GRINDERS

Part Number	Collet Insert	Sound Level	Max Air Flow SCFM (L/Min)	Hose Size Inch (mm)	Air Inlet Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
DYBDGS31	1/4"	84 dB(A)	18 (510)	3/8 (10)	1/4" NPT	.98 (.44)	6.2 (157)	1.6 (41)
DYBDGS51	1/4"	83 dB(A)	26 (736)	3/8 (10)	1/4" NPT	1.35 (.61)	7.4 (188)	1.8 (46)

CUT-OFF TOOLS



ACA6505R Cut-Off Tool - Red Handle

- Ultra Quiet 82 (Decibels)
- Ergonomically designed handle (reduces operator fatigue)
- 2.5 HP • 3" cutting blade
- Protective cover



ACA6560 1 HP 4" Cut Off Tool

- 1 HP Non stall motor • 1400 RPM
- Single reduction gear increases torque and stall resistance
- Composite handle and grip for comfort
- Low noise only 89 dBA



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ACA6525-A 3" Inline Cut-Off Tool with Adjustable Guard

- .6 HP motor prevents stalling
- 9 position adjustable guard
- Composite grip for comfort
- Rear exhaust for safety
- Side mounted wheel allows for straighter cuts



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ACA6275-A 4" Composite Inside Cut-Off Tool

- New upgraded 1 HP motor • Superior Steel gears
- New Spindle lock for easy wheel change
- 11 position rotational guard
- Compact tapered gear housing to get in tight spots



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DYBECU4 Nitro Series 4" Diameter Extension Right Angle Cut-Off Wheel Tool

- Model accepts 4 in. (76 mm) diameter Type 41 reinforced Cut-Off Wheels, with 3/8 in. (9.5 mm) center hole
- Composite grip absorbs vibration and reduces cold air transmission to operator
- Lock-lever controlled, multi-position guard
- 14,000 RPM • 1hp



CUT-OFF TOOLS



KT188255

Utility / Muffler Cut-off Tool

- 20,000 rpm
- Use with 3" diameter abrasive discs
- Cutting shield
- 3/4" capacity • 4 cfm



Standard equipment includes an abrasive 3" disc cutter, independent power regulator, a hand guard trigger and see through cutting shield.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT426

Reversible Cut Off Tool with 5 Cut Off Wheels Included

- 20,000 RPM max free speed
- 3" cutting wheel diameter • Rear exhaust



IRT326

Heavy Duty Air Cut-Off Tool

- 3/8" arbor x 2-7/8" wheel size
- Fast, quiet operation
- Contoured level throttle with positive self-locking action
- Built in speed regulator
- 360 degree rotatable chrome-plate spark guard



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SPJSP-7231

Flex Head Cut Off Tool

- Three-position, flexible head
- Head adjusts 22-1/2° off center in either direction and locks into place for added versatility
- Ergonomic design cushion-grip handle • Rear exhaust
- Safety throttle lever and built-in power regulator
- Flexible head for greater access into tight work places



MADE IN JAPAN



AST209

3" In-Line Cut-Off Tool

- Unique in-line design provides greater control
- Positive control and lock-out throttle protection
- Adjustable protection guard • Variable speed control
- Chrome plated steel spark guard



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Chicago Pneumatic

CPT874

General Duty High Speed Cut-Off Air Tool

- Built-in regulator matches speed to job
- Lock off throttle to prevent accidental start up
- Rear exhaust directs air away from work area
- Excellent for cutting through sheet metal, fiberglass, bolts, muffler clamps and hangers as well as grinding down burrs and rough edges



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPTCP9116

Extended Cut Off Tool

- Extended length for better reach - 14.6" overall
- 1 HP motor / 14000 RPM • 4" cutting wheels
- Spindle lock system and 11 position adjustable swivel guard
- Tapered angle gear housing

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT7500D

2" Angle Grinder / Cut Off Tool

- Free speed: 22,000 RPM
- Small at 5.5" in length; compact and lightweight
- Side exhaust directs air away from the work surface; full 180° protective guard
- Tool includes two 2" cutting wheels, one each of 2" 60, 80, 120 grit grinding wheels and CP Exclusive Attachment System



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR SANDERS & POLISHERS



IRT8102MAX Random Orbital Sander - Premium (3/16")

- Low vibration and lightweight ergonomic design
- Powerful .27 hp motor and variable-speed regulator
- Reduced vibration and improved stability increase abrasive pad life
- Multi-stage noise suppression filter allows for quiet operation
- 6" backing pad (PSA), free speed is 0-10,500 rpm



IRT8103MAX Random Orbital Sander - Premium (3/8")

- 6" backing pad (PSA), free speed is 0-9,500 rpm

IRT8201MAX Random Orbital Sander - Premium (3/32") - Vacuum Ready

- Multi-stage noise suppression filter allows for quiet operation
- 6" backing pad (Hook and Loop), free speed is 0-11,500 rpm



IRT8203MAX Random Orbital Sander - Premium (3/8") - Vacuum Ready

- 6" backing pad (Hook and Loop), free speed is 0-9,500 rpm

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT4151 Ultra Duty Vacuum Ready Random Orbital Air Sander

- 12,000 rpm free speed, weighs less than 2 lbs., pad diameter: 6", Lubrication free motor

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT311A Dual Action Quiet Air Sander with 6" Pad

- Low vibration
- Dependable performance
- Balanced ball bearing construction
- Adjustable built-in regulator for positive speed control

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT328B 8" Air Orbital Sander

- Dual action pad motion (5/32" orbit)
- Long-life, vibration free performance
- Balanced ball bearing construction
- Free speed: 825 RPM • 8" pad

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT314A 7" Heavy Duty Polisher and Buffer

- Ball bearing construction
- Built-in regulator • 7" Pad
- Up to 2500 RPM in free speed
- Dead handle and spindle for easy handling

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT315 Heavy Duty Twin Piston Straight Line Air Sander

- Quick action paper clamps, free speed: 3,000 rpm, 2-3/4" x 17-1/2" Pad

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT317A Heavy Duty Air High-Speed Sander with 5" Pad

- Built-in power regulator, free speed: 18,000 RPM comes with two backing pads, 3" and 5"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DYBDS32 Nitro Series 2" Diameter Right Angle Disc Sander

- Ideal for metal sanding in weld preparation, deburring and deflashing, surface conditioning and paint removal
- Ergonomic tools accept locking-type abrasive discs (coated and non-woven nylon)
- Tactile, thermoplastic rubber tool grip reduces cold air transmission • Includes safety-lock lever
- Rear positioned 360 degree rotatable side exhaust



AIR SANDERS & POLISHERS



Mini Sander and Polisher Kits

- Rubber molded palm grip for added comfort
- Adjustable speed regulator to match the speed to the job
- Two-finger throttle for easier control and less fatigue
- Silenced handle exhaust directs air away from work area

CPT7200S

Mini Random Orbital Sander Kit

Kit includes mini random orbital sander, (1) 2" and 3" backing pads, (10) 2" 320, 400 and 600 grit sand paper, (10) 3" 320, 400 and 600 grit sand paper and spindle key packed in a heavy duty carrying case. Free speed: 15,000 rpm; average air consumption: 10.5 cfm; air inlet thread: 1/4" NPTF; minimum hose size: 3/8"; sound dBA: 86; weight: 1.5 lbs.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7201P

Mini Polisher Kit

Kit includes: mini disc polisher plus (1) 3" backing pad, (2) 3-1/2" foam compounding pads(white/yellow) and spindle wrench packed in a heavy duty carrying case. Polisher is 1.5 lbs. (small and light weight). Free speed is 2,500 rpm. Rubber molded palm grip for added comfort. Adjustable speed regulator to match the speed to the job.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT870

Dual Action Sander

- Rotary and orbital motion for rapid removal as well as fine finishing
- Power regulator for precise control
- Lock off throttle to prevent accidental start ups
- Insulated grip provides comfort to operator
- Excellent for blending and smoothing filler, feather edging and pre-paint preparation
- 1 yr warranty on material and workmanship



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7202D

Mini Disc Sander Kit

- Silenced handle exhaust
- Adjustable power regulator
- Rubber molded palm grip for added comfort
- Two finger throttle for easier control and less fatigue

Kit includes: mini disc sander plus (1) 3" backing pad, (10) 3" 80, 100 and 120 grit sanding discs, (1) 3" fine, medium and coarse surface prep discs and spindle wrench packed in a heavy duty carrying case.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST322P

6" Palm Sander with 3/16" Stroke

- High powered
- Super lightweight (1.5lbs./ .68kg) and compact for minimum operator fatigue
- Orbital action assures final swirl-free finish
- Sealed bearings for extended life

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST330

ONYX 3" Finishing Palm Sander with Hook and Loop Backing Pad

- Composite Lever, Housing, and Rotor for comfortable ease of operation
- Easily replaceable drop-in motor for tool maintenance
- Built-in regulator for positive speed control
- New muffling system reduces sound level
- Ergonomic grip provides greater operator comfort and control

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR SANDERS & POLISHERS



KT185746

"Quiet" Dual-Action Sander

- Built-in speed regulator
 - Variable speed trigger
 - Shielded ball bearing for longer life with smooth harmonics
 - 6" flexible foam sanding pad with vinyl
- Specifications: 10,000 rpm; 6" pad; 8-1/4" length; 4 lbs.; 4 cfm average air consumption.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT185846

High Performance "Quiet" Dual-Action Sander

- Produces a far superior blending and smoothing of filler, feather edging and pre-paint preparation
 - Dual-action "quiet" sander has a high efficiency motor and an all steel balancer body and steel spindle lock nut
 - This balancer is crossbolt-style hub mounting which minimizes vibration
- Specifications: 10,000 rpm; 6" pad; 8-1/4" length; 4 lbs.; 4 cfm average air consumption.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT185265

Variable Speed Sander

- 2,000 - 18,000 rpm variable
 - 3 pad sizes included
 - One-piece all metal housing
 - Independent power regulator and teasing trigger
 - Includes 3", 4" and 5" pads; ideal for removing paint and rust, shaping filler patches and smoothing welds
- Specifications: 6-1/2" length; 3.5 lbs.; 6 cfm average

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT185807

7" Horizontal Air Sander

- Includes a multiposition handle for a variety of uses and ergonomic comfort
 - Designed for reliability and superior performance
- Specifications: 2,800 rpm; 7" pad; 16" length; 6 lbs.; 7 cfm average air consumption.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT185800

Dual Piston In-line Sander / File

- Features a four-cylinder systems
 - Double acting pistons constantly work in opposition to each other, resulting in more power and a smoother, more reliable tool
- Specifications: 3,000 rpm; 1" stroke; 2-3/4" x 15-3/4" pad; 15-3/4" length; 6.5 lbs.; 6 cfm average air consumption.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA6320

Spot Sander

- Features internal 1/8" orbital head
- The combined spindle-counter balance reduces vibration levels to 1.8m/sec
- Comes with 3 pads (1.25" round, 2" round, and a triangular pad for corners)
- Spiral-bevel gears made of alloy steel
- Very quiet, only 79 dBA • 2 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACA6700-6-336

6" Non Vac Orbital Palm Sander

- Pad type Hook and Loop
- Patented double sealed, lubrication free motor prevents dust contamination of the motor and eliminates the need for oiling
- Features smooth design throttle lever and ergonomic grip
- Patented anti vibration motor • Low profile design
- 2 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR SANDERS & POLISHERS



AST3037 Air Belt Sander (1/2" x 18") with 3 Belts

- Great for spot weld removal
- Simple belt tension lever
- Variable speed control, increased pulley space for new thicker belts, and non-slip handle grip
- Includes: 40 grit sanding belt 1/2" x 18", 60 grit sanding belt – 1/2" x 18", 80 grit sanding belt – 1/2" x 18"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST3035 Air Belt Sander (20 x 520mm) with 2 Belts

- Simple belt tension lever and belt protection guard
- Non-slip handle grip
- Variable speed control
- Increase pulley space for new thicker belts
- Unit comes with: (1) sanding belt 80 grit - 20mm x 520mm and (1) sanding belt 100 grit - 20mm x 520mm

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST3036 Air Belt Sander (10 x 330mm) with 3 Belts

- Simple belt tension lever
- Non-slip handle grip
- Variable speed control
- Increase pulley space for new thicker belts
- Unit comes with: (1) sanding belt 80 grit - 10mm x 330mm, (1) sanding belt 100 grit - 10mm x 330mm and (1) sanding belt 120 grit - 10mm - 330mm.



SPJSP-1380 20mm Belt Sander

- Belt size 20mm (3/4") wide by 20-1/2"
- Lightweight and powerful, weighing only 3.1 pounds
- Low vibration and sound levels
- Easy to use and ergonomically designed to easily fit your hand and maneuver
- Durable and high quality construction



MMM33575 3M™ File Belt Sander

- Allows technicians to access hard to reach areas
- Great for spot weld removal, deburring, cleaning, and finishing

The 3M™ Body Repair File Belt Sander allows technicians to access hard to reach areas and is great for spot weld removal, deburring, cleaning, and finishing



MMM33573 3M™ Mini File Belt Sander

- Allows technicians to access hard to reach areas
- Great for spot weld removal, deburring, cleaning, and finishing



DYBNF1 Nitro Series NITROFILE Abrasive Belt Tool

- Abrasive belt tools can be used throughout a body shop for a variety of sanding, blending and finishing applications
- Sanding head pivots 306 degrees for working in previously inaccessible areas
- Quick and easy belt and contact arm changes
- Ergonomic, offset handle with safety-lock throttle lever
- Runs belts 1/4"-3/4" wide by 18" long



DYBMNF1 Nitro Series MINI-NITROFILE Abrasive Belt Tool

- Sand and deburr in tight spots
- Accepts coated and abrasive-impregnated non-woven nylon belts
- Swing away belt guard for easy abrasive change
- Multi-position grinding head pivots 180 degrees
- Includes safety-lock lever



AIR SANDERS & POLISHERS



HUT3800

Model 800 Orbital Sander

- Most versatile orbital sander ever made
- Adapts to every surface preparation need
- Heavy duty to feather finishing
- Powerful air-efficient motor with 5 point suspension guarantees 44 square inches of uniform, full contact sanding
- Low maintenance, high productivity
- RPM: 8,500 + • Air consumption: 11.4 cfm
- 90 PSI • Noise level: 89 dBA
- Pad size: 2-3/4" x 16"



HUT2000

Model 2000 Hustler Straightline Reciprocal Air Sander

- The only 2-Cylinder, common piston straightline with vertically-engaged, twin-drive gears
- Lack of "rolling gears" eliminates "humping and jumping" at the end of each reciprocal stroke
- Two in-line cylinders, micro-honed to eliminate cylinder-wall drag, power an oversized high-alloy piston
- Double rack and pinion gear assemblies give twice-normal gear contact for maximum balance and thrust



HUT2023

Hustler II Mini-Straightline Air Sander with 2-3/4 x 8" Pads

- Same mechanical advantages as 2000-MOM, without Multi-Options
- 2-cylinder, twin-drive, with vertically engaged gears, ensures pure reciprocal strokes so smooth that coarse sanding, ultra-fine sanding, or blemish removal are a matter of adjusting the speed and choosing the right grit



HUT505

ProFinisher Orbital Sander

- Smaller rectangular orbit allows better sanding access for bumpers, recessed areas, and new panel prep
- Orbital Sander with a 3/32" offset
- Comes with a 2-3/4" x 5-1/2" hook pad
- Uses standard 2-3/4" velcro sandpaper rolls
- Hook pads securely hold scuff pads



HUT525

ProFinisher VA Mini Orbital Board Hook Sander - 2-3/4" x 5-1/2"


- 3/32" Offset
- 2 3/4" x 5 1/2" Hook Pad
- Uses Standard 2 3/4" sandpaper rolls
- Smaller rectangular orbit allows better sanding access for bumpers, recessed areas, and new panel prep



HUT528

ProFinisher VA Mini Orbital Board Hook Sander - 2-3/4" x 8"

- 3/32" Offset
- 2-3/4" x 8" VA Hook Pad
- Uses Standard VA 2 3/4" sandpaper rolls



HUT508

ProFinisher Mini Orbital Board Hook Sander - 2-3/4" x 8"

- 3/32" Offset
- 2-3/4" x 8" Hook Pad
- Uses Standard 2-3/4" sandpaper rolls



HUT503

ProFinisher™ 503 Random Orbit Action Sander

- 3/32" Offset
- 3" hook pad size allows for better sanding access for bumpers, doorjams or any hard-to-reach area
- Designed to direct cold exhaust air away from operator
- Easy to replace drop-in motor assembly to reduce down time
- Ergonomically engineered trigger assembly for added comfort and reduced operator fatigue



HUT603

ProFinisher™ 603 Random Orbit Action Sander

- 3/16" offset (red air inlet) for the bodyman for shaping and feather-edging or headlight restoration

AIR SANDERS & POLISHERS



HUT3500 6" Super III Lightweight Random Orbit Sander

- Lightweight eliminates fatigue
- Precision speed-control
- Low profile guarantees operator control
- Air Consumption at 90 PSI: 11.0
- Speed: 10,000+ rpm
- PSI: 80 dBA at 90 lb.



HUT4500 Random Orbit Action Air Sander

- Researched and developed for ultra-fine finishing
- Custom handle option (handle not furnished with sander) guarantees proficient control at any angle
- Flex-cover gives comfortable grip, prevents stiff fingers
- Low profile, vibration-free motor insures full contact sanding
- Unique air efficiency system



HUT3560 6" Standard Random-Orbit Sander

- The composite motor housing and shroud reduce weight and insulate to insure vibration – free sanding
- RPM: 10,000+ • Noise level: 84 DBA • Weight: 2lbs. 3.5oz.
- Air consumption: 11.0 cfm @ 90 PSI
- The unique 4 bearing support and oversized drive head eliminate pad wobble while insuring full pad contact
- Patented pad release feature



HUT500 ProFinisher™ 500 Random Orbit Action Sander

- 3/32" offset with a less aggressive sanding action and is perfect for pre and post paint sanding applications
- Made for pre and post paint sanding applications
- Smooth, low-vibration operation
- Lightweight, ergonomic design
- Designed to use either 5" or 6" pad



HUT600 ProFinisher™ 600 Random Orbit Action Sander

- The 3/16" offset delivers aggressive material removal with comfortable low vibration operation
 - Aggressive material removal
 - Lightweight, ergonomic design
 - Designed to use either 5" or 6" pad
- Intended for use by technicians seeking fast, smooth operation. Its reliability and performance makes this a top choice among professionals from all sanding industries.



HUT700 ProFinisher 700 Random Orbit Action Sander

- 5/16" (8mm) Offset
- 12,000 RPM
- Designed to direct cold exhaust air away from the operator
- Easy to replace drop-in motor assembly to reduce down time



HUT700H ProFinisher 700H Random Orbit Action Sander with 6" Hook Pad

- 5/16" (8mm) Offset • 12,000 RPM
- Designed to direct cold exhaust air away from the operator
- Easy to replace drop-in motor assembly to reduce down time

TITAN



TIT19225 6" Orbital Palm Sander

- Low profile design with ergonomic grip
- Random orbital action assures a swirl-free finish
- Variable air speed control
- 5mm orbit for rapid material removal
- 6" diameter premium urethane vinyl face pad
- Lifetime warranty

AIR SANDERS & POLISHERS



DYB21015

3/8" Dynorbital-Spirit Random Orbital Sander

- 0.25 Hp, 12,000 rpm, Ergo palm style grip, with rear exhaust
- Applications: sanding, color sanding, feather edging, scuffing, finishing and blending
- Materials: metals, aluminum, stainless steel, plastics, fiber clear coats and body fillers
- Includes: low profile, premium urethane, weight-mated, non-vac pad (PN56107)
- One-piece speed control dial



DYB21035

3/16" Cut

Dynorbital-Spirit™ Sander

- Low profile design with ergonomic grip
- Color-coded levers identify orbit size
- Less weight, more power - 12,000 rpm
- Three orbit diameters to choose from 6" 3/16" Diameter Orbit - Grey Lever - for general sanding
- Low-profile, premium urethane, weight-mated 6" sanding pad included with the tool



DYB21055

3/32" Cut

Dynorbital-Spirit™ Sander

- Includes low profile, premium urethane weight-mated sanding pad
- Black lever identifies 3/32" diameter orbit used for ultra-fine sanding
- Comfort platform provides additional hand and wrist support, further enhancing operator comfort
- Speed control allows thumb-control regulating of tool speed



Dynorbital-Spirit 6" (152 mm) Random Orbital Sanders

- Dynorbital-Spirit sanders make quick work of heavy material removal applications
- The wide throw sands a greater surface area than general and fine finishing sanders
- The Dynaorbital-Spirit is the lightest random orbital sander from Dynabrade and is ideal for vertical feather-edging applications where technicians are working in front of their body or at eye level with a vehicle raised on a lift
- Weighing less than 2 pounds, the Spirit sander reduces operator fatigue and relieves stress on wrist and arms
- Tool Spindle Thread: 5/16" - 24 Female

Random Orbital Sander - Non-Vacuum

DYB59178 - 3/8 inch Diameter Orbit

DYB59180 - 3/32 inch Diameter Orbit

Random Orbital Sander - Central Vacuum


DYB59181 - 3/8 inch Diameter Orbit

DYB59183 - 3/32 inch Diameter Orbit

Random Orbital Sander - Self Generated

DYB59184 - 3/8 inch Diameter Orbit

DYB59186 - 3/32 inch Diameter Orbit

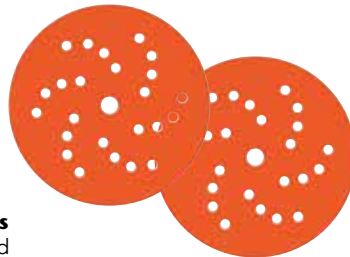

6" Diameter Dynacut

Extreme Orange Premium Film Discs

- Manufactured with a premium P graded aluminum oxide abrasives for fast cut and long life
- Extremely tough and tear resistant high performance 3mil film backing generates the finest finishes and up to 4X the life of paper discs
- Proprietary clog free coating is pigment free and provides a "build-up" resistant abrasive surface further extending product life
- The hook and loop attachment system makes disc changes quick and easy and discs can be saved for future use when not completely worn

EXTREME ORANGE PREMIUM FILM DISCS

Part Number	Grit	Type	Color	Qty
DYB91611	800 grit	Vac	Orange	50pk
DYB91610	600 grit	Vac	Orange	50pk
DYB91569	320 grit	Vac	Orange	50pk
DYB91567	180 grit	Vac	Orange	50pk
DYB91579	400 grit	Non-Vac	Orange	50pk
DYB91578	320 grit	Non-Vac	Orange	50pk
DYB91576	180 grit	Non-Vac	Orange	50pk

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR SANDERS & POLISHERS



Dynorbital-Spirit Random Orbital Sanders

- Includes low profile, premium urethane weight-mated sanding pad
- True 12,000 RPM air motor
- High-strength, composite rotor has better lubricating qualities, allowing blades to last longer



SPIRIT RANDOM ORBITAL SANDERS

Part Number	Vac Style	Tool Dia. inch (mm)	Dia. Orbit inch (mm)	Sound Level	Max Air Flow	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
DYB59000	Non-Vac	3-1/2 (89)	3/8 (10)	85 dB(A)	14 (396)	1.4 (.6)	6 (152)	3-1/2 (89)
DYB59003	Self Gen Vac	3-1/2 (89)	3/8 (10)	82 dB(A)	14 (396)	1.57 (.7)	8.5 (152)	3-1/2 (89)
DYB59005	Non-Vac	5 (127)	3/8 (10)	81 dB(A)	14 (396)	1.57 (.7)	6-1/2 (165)	3-1/2 (89)
DYB59013	Self Gen Vac	6 (152)	3/8 (10)	85 dB(A)	14 (396)	1.7 (.7)	9 (229)	3-1/2 (89)
DYB59014	Central Vac	6 (152)	3/8 (10)	84 dB(A)	14 (396)	1.6 (7)	7-3/4 (197)	3-1/2 (89)
DYB59015	Non-Vac	3-1/2 (89)	3/16 (5)	80 dB(A)	14 (396)	1.4 (.6)	6 (152)	3-1/2 (89)
DYB59018	Self Gen Vac	3-1/2 (89)	3/16 (5)	85 dB(A)	14 (396)	1.4 (.6)	8-1/2 (216)	3-1/2 (89)
DYB59023	Self Gen Vac	5 (127)	3/16 (5)	82 dB(A)	14 (396)	1.5 (.7)	8-1/2 (216)	3-1/2 (89)
DYB59024	Central Vac	5 (127)	3/16 (5)	81 dB(A)	14 (396)	1.5 (.6)	7-1/4 (184)	3-1/2 (89)
DYB59029	Central Vac	6 (152)	3/16 (5)	83 dB(A)	14 (396)	1.6 (.7)	7-3/4 (197)	3-1/2 (89)
DYB59035	Non-Vac	5 (127)	3/32 (2.5)	81 dB(A)	14 (396)	1.4 (.6)	6-1/2 (165)	3-1/2 (89)
DYB59039	Central Vac	5 (127)	3/32 (2.5)	83 dB(A)	14 (396)	1.4 (.6)	7-1/4 (184)	3-1/2 (89)
DYB59040	Non-Vac	6 (152)	3/32 (2.5)	82 dB(A)	14 (396)	1.5 (.6)	7 (178)	3-1/2 (89)
DYB59043	Self Gen Vac	6 (152)	3/32 (2.5)	86 dB(A)	14 (396)	1.5 (.7)	9 (229)	3-1/2 (89)
DYB59044	Central Vac	6 (152)	3/32 (2.5)	80 dB(A)	14 (396)	1.5 (.7)	7-3/4 (197)	3-1/2 (89)
DYB59100	Non-Vac	3 (76)	3/8 (10)	79 dB(A)	14 (396)	1.4 (.6)	6 (152)	3-1/2 (89)
DYB59104	Central Vac	3 (76)	3/8 (10)	79 dB(A)	14 (396)	1.5 (.6)	7 (178)	3-1/2 (89)
DYB59105	Non-Vac	3 (76)	3/16 (5)	79 dB(A)	14 (396)	1.4 (.6)	6-1/2 (165)	3-1/2 (89)
DYB59109	Central Vac	3 (76)	3/16 (5)	83 dB(A)	14 (396)	1.4 (.6)	7-1/4 (184)	3-1/2 (89)
DYB59110	Non-Vac	3 (76)	3/32 (2.5)	81 dB(A)	14 (396)	1.3 (.6)	7 (178)	3-1/2 (89)
DYB59114	Central Vac	3 (76)	3/32 (2.5)	84 dB(A)	14 (396)	1.4 (.6)	7-3/4 (197)	3-1/2 (89)

DYB57500

Palm-Style Mini-Dynorbital Random Orbital Sander

- Random orbital action provides ultra-smooth finishes on wood and coated surfaces. Sanding head provides the random action. Also excellent on metal and composites. Ideal for finesse sanding. Weighs only 1.7 lbs., for great operator comfort and control
- Includes 54034 Sanding Head (accepts sanding pads with 1/4"-20 female thread)
- Includes 3/4" dia. pad (54017) and 1-1/4" dia. pad (54018) with sample micro-finishing film abrasive discs. Confines sanding to smallest possible area
- HP: 0.05 • Max. RPM: 5,000



AIR SANDERS & POLISHERS



Dynabrade® Two-Hand Series Random Orbital Sander

- Ideal for achieving swirl-free finish on wood, metal, fiberglass, solid surface, plastic and more
- HP of 0.45 • 1/4" hose I.D. size, Air inlet of 1/4" NPT



TWO-HAND TOOL SERIES RANDOM ORBITAL SANDERS

Part Number	Vac Style	Motor RPM	Orbital Dia. Inch (mm)	Pad Dia. Inch (mm)	Max Air Flow	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
DYB58400	Non-Vac	12,000	3/16 (5)	5 (127)	3/23 (651)	2.5 (1.1)	11-1/16 (280)	4-15/16 (126)
DYB58401	Vac-Ready	12,000	3/16 (5)	5 (127)	3/23 (651)	2.5 (1.1)	11-1/16 (280)	4-15/16 (126)
DYB58409	Central-Vac	12,000	3/16 (5)	6 (152)	3/23 (651)	2.7 (1.2)	11-3/8 (288)	4-15/16 (126)
DYB58410	Non-Vac	10,000	3/16 (5)	8 (203)	3/23 (651)	4.0 (1.8)	12-1/2 (319)	5-5/8 (142)
DYB58411	Vac-Ready	10,000	3/16 (5)	8 (203)	3/23 (651)	4.0 (1.8)	12-1/2 (319)	5-5/8 (142)
DYB58415	Non-Vac	12,000	3/8 (10)	5 (127)	3/23 (651)	2.5 (1.1)	11-1/16 (280)	4-15/16 (126)
DYB58418	Non-Vac	12,000	3/8 (10)	6 (152)	3/23 (651)	2.5 (1.1)	11-1/16 (280)	4-15/16 (126)
DYB58419	Vac-Ready	12,000	3/8 (10)	6 (152)	3/23 (651)	2.7 (1.2)	11-3/8 (288)	4-15/16 (126)
DYB58420	Central-Vac	12,000	3/8 (10)	6 (152)	3/23 (651)	2.7 (1.2)	11-3/8 (288)	4-15/16 (126)

Dynabrade® Two-Hand Series Dual Action Sanders

- Combination disc sander and random orbital sander
- HP of 0.45 • 1/4" hose I.D. size, Air inlet of 1/4" NPT



TWO-HAND TOOL SERIES DUAL ACTION SANDERS

Part Number	Vac Style	Motor RPM	Orbital Dia. Inch (mm)	Pad Dia. Inch (mm)	Max Air Flow	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
DYB58431	Vac-Ready	12,000	3/16 (5)	5 (127)	3/23 (651)	2.6 (1.2)	11-1/16 (280)	5-1/8 (131)
DYB58435	Non-Vac	12,000	3/16 (5)	6 (152)	3/23 (651)	2.8 (1.3)	11-1/2 (293)	5-1/8 (131)
DYB58436	Vac-Ready	12,000	3/16 (5)	6 (152)	3/23 (651)	2.7 (1.2)	11-1/2 (293)	5-1/8 (131)
DYB58460	Non-Vac	12,000	3/16 (5)	3 (76)	3/23 (651)	2.35 (1.0)	10-5/16 (263)	5-3/8 (137)
DYB58461	Vac-Ready	12,000	3/16 (5)	3 (76)	3/23 (651)	2.35 (1.0)	10-5/16 (263)	5-3/8 (137)
DYB58466	Vac-Ready	12,000	3/16 (5)	3-1/2 (89)	3/23 (651)	2.35 (1.0)	10-5/16 (263)	5-3/8 (137)

AIR SANDERS & POLISHERS



HiVac Dynorbital-Spirit Random Orbital Sanders

- 3" (76) diameter Self-Generated HiVac Dynorbital-Spirit efficiently vacuums through 6-hole sanding pad and unique shroud design. Ergonomically designed to the highest standards of Dynabrade technology. Sanding pad is weight-mated to tool, ensuring low vibration and smooth finishes. Tool weight of 1.3 pounds (0.6 kg) minimizes operator fatigue
- Innovative V-Seal protects double row balancer bearing from sanding residue for longer tool life. Unique Top Hat seal protects front motor bearing from contaminants while maintaining bearing lubrication



HIVAC RANDOM ORBITAL SANDERS

Part Number	Vac Style	Dia. Orbit inch (mm)	Motor RPM	Motor hp (W)	Sound Level	Max Air Flow	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
DYB59115	Self Gen Vac	3/16 (5)	12,000	25 (186)	81 dB(A)	14 (396)	1.3 (0.6)	7-3/4 (197)	3-3/4 (95)
DYB59116	Self Gen Vac	3/32 (2.5)	12,000	25 (186)	81 dB(A)	14 (396)	1.3 (0.6)	7-3/4 (197)	3-3/4 (95)
DYB59117	Central-Vac	3/16 (5)	12,000	25 (186)	79 dB(A)	14 (396)	1.3 (0.6)	6-1/2 (166)	3-3/4 (95)
DYB59118	Central-Vac	3/32 (2.5)	12,000	25 (186)	79 dB(A)	14 (396)	1.3 (0.6)	6-1/2 (166)	3-3/4 (95)



Dynabug II Orbital Finishing Sanders

- Powerful .15 hp (112 W), 10,000 RPM air motor gets the job done in countless applications, utilizing just 13 SCFM (368LPM) at 90 PSI (6.2 Bar)



DYNABUG II ORBITAL FINISHING SANDERS

Part Number	Vac Style	Motor RPM	Motor hp (W)	Sound Level	Max Air Flow	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
DYB58500	Non-Vac	10,000	.15 (112)	78 dB(A)	13 (368)	1.6 (.7)	5-3/4 (147)	3-1/2 (91)
DYB58503	Non-Vac	10,000	.15 (112)	78 dB(A)	13 (368)	1.6 (.7)	6-1/4 (1857)	3-1/2 (91)
DYB58502	Central-Vac	10,000	.15 (112)	81 dB(A)	13 (368)	1.6 (.7)	7 (180)	3-1/2 (91)
DYB58505	Central-Vac	10,000	.15 (112)	81 dB(A)	13 (368)	1.6 (.7)	7-1/2 (190)	3-1/2 (91)
DYB58506	Central-Vac	10,000	.15 (112)	81 dB(A)	13 (368)	1.6 (.7)	8-3/4 (222)	3-1/2 (91)
DYB58511	Non-Vac	10,000	.15 (112)		13 (368)			
DYB58512	Central-Vac	10,000	.15 (112)		13 (368)			
DYB58513	Non-Vac	10,000	.15 (112)		13 (368)			
DYB58514	Non-Vac	10,000	.15 (112)		13 (368)			
DYB58515	Central-Vac	10,000	.15 (112)		13 (368)			
DYB58516	Non-Vac	10,000	.15 (112)		13 (368)			

AIR SANDERS & POLISHERS



DYB58443
Two-Hand Gear-Driven
6" Diameter Sander, Central Vacuum

- Central Vacuum models are designed for use with central vacuum system or external vacuum source. Includes combination lip-seal shroud-overskirt, which allows greater workpiece visibility and enhanced vacuum capability
- Dust is extracted away from air motor (reducing contamination) for a smoother, easier path of extraction
- Anti-clog design for efficient sanding of damp filler material
- Includes low profile, premium urethane sanding pad (6 holes). Vacuum shroud has 1" outside diameter vacuum port
- .45 hp, 900 RPM, Rear Exhaust, Vinyl-Face Pad

DYB58446
Two-Hand Gear-Driven
8" Diameter Sander, Central Vacuum



DYB57922
Dynabug "Model T" Orbital
5" Sander, Non-Vacuum

- 3/32" diameter orbital action is ideal for fine finishes. Lightweight only 1 lb! Palm-style, ergonomic design features low profile grip for greater operator comfort and control. Operates 8-9 SCFM at 90 PSIG. Can be run by as little as 3 horsepower compressor
- Turbine-style vaneless air motor needs no oil
- Uses re-attachable and PSA (adhesive-backed) abrasive sheets and discs; coated and non-woven nylon
- Includes 5" Diameter 56249 Vinyl-Face Pad
- Max. RPM: 20,000

DYB57924
Dynabug "Model T" Orbital
5" Sander, Non-Vacuum

- Includes 5" Diameter 56248 Hook-Face Pad

DYB57927
Dynabug "Model T" Orbital
6" Sander, Non-Vacuum

- Includes 6" Diameter 56268 Hook-Face Pad

DYB57929
Dynabug "Model T" Orbital
4" Sander, Central Vacuum

- Has 1" outside diameter vacuum port for easy central vacuum connection.
- Includes 56285, 4-14" x 4-1/2", Hook-Face Pad



DYB57908
Wet Dynabug "Model T" Orbital
5" Diameter Sander

- Each model includes all hardware for self-siphoning with 20 ft. of water hose. Brass weight drops into bucket for ease of use. Lightweight, only 1.5 lbs! Palm-style, ergonomic design features low profile grip for greater operator comfort and control
- Up to 3/16" diameter orbital action, with adjustable speed control. 5" and 6" diameter pads are interchangeable. Fast, smooth and uniform surface preparation; reduces labor time
- Our unique water feed through-the-pad design allows use of standard round wet paper with holes. No special sand paper or hole punch needed! Fingertip control valve allows for precise water flow
- Includes standard 58086 Hook-Face Pad and soft 53978 Interface Pad for contours
- Max PRM: 20,000

DYB57909
Wet Dynabug "Model T" Orbital
6" Diameter Sander



DYB61HS
6" Diameter Non-Vacuum Dynorbital
Extreme Random Orbital Sander

- Power-to-weight ratio of 0.3 hp at 1.8 lbs.
- Soft grip co-molded to rigid composite base housing for maximum comfort and durability
- Recessed throttle lever eliminates pinch and pressure points on an operator's palm
- Premium sanding pad is weight-mated for the lowest vibration levels
- American-made from the highest grade materials for long-life and high durability
- This model includes a speed regulator

DYB61VHS
6" Diameter Central-Vacuum
Dynorbital Extreme Random
Orbital Sander with Speed
Regulator



AIR SANDERS & POLISHERS



DYB10029 Dynabrade Mini Raptor Vacuum Pro-Pack

- Auto on/off
- Includes premium cart with accessory shelf
- On-board, stackable and lockable storage
- Includes tool and hose hanger
- Stainless canister with HEPA filter and bag
- 2 year warranty on material and workmanship



DYB10030 Mini Raptor Vacuum Enhanced Pack

- Includes premium cart with accessory shelf
- Includes tool and hose hanger
- Industrial locking casters
- Stainless canister with Hepa filter and bag
- Ergonomic hose assembly
- 2 year warranty on material and workmanship

DYB10031 Mini Raptor Vacuum Standard Pack

- Includes carriage handle & dolly
- Includes tool & hose
- Stainless canister with HEPA filter and bag
- Light weight
- Ergonomic hose assembly
- 2 year warranty on material and workmanship



DYB57550

Palm-Style Rotary 3" Diameter Buffer

- 3" Diameter Buffer, .25 hp, for repair of sanding scratches on clearcoat
- 3" Diameter, 2,400 RPM. Excellent for buffing and polishing fiberglass, plastics and other materials
- Includes rigid 3" backing pad, Terry Cloth Pad and Wool Pad
- Low profile housing; rear exhaust; lever throttle
- Max. RPM: 2,400

DYB57553

Palm-Style Rotary 3" Diameter Buffer Kit

- Includes basic tool; Mini-Orbital Head; 3" backing pad; 1-1/4" and 3-1/2" dia. vinyl-face pads; 3" dia. terry cloth bonnet, wool bonnet and foam 'flat face' pad, Dynabrade Finesse-It Creme; Dynabrade Glaze, sample discs and sample abrasive pack. (14 mm and 19 mm wrenches also included)



DYBEB3

Nitro-Series 3" Extended Buffer

- Tool includes Hook-Faced backup pad
- Tactile, thermoplastic grip
- 2,700 rpm with 3/8"-24 male spindle, rear exhaust
- Rotational rear exhaust directs cold air away from operator
- Includes safety-lock lever



MEGMT300

Meguiar's® Professional DA Polisher

- Wide OPM range, 3000-7500
- Optimized for compounding, polishing and waxing
- Digital Torque Management (DTM)
- Billet counter weight for smooth precision balance
- Replaceable brushes

SPJSP-7500AHM 3" Angle Mini Polisher

- Well balanced
- Low speed and high power
- Wide range of users • Polish small area
- Polish complex shapes



AIR SANDERS & POLISHERS

Astro



AST3050 Complete Dual Action Polishing and Sanding Kit

- Kit includes: Pistol grip Dual action sander/polisher tool 2,800 rpm-13,000 rpm 1 - 3" Sanding/Polishing Back-up Pad 1 - 1-1/2" Velcro holder 1 - 1-1/2" Sanding pad 1 - 3" Polishing foam pad 2 - 3" 400 Grit sanding disc 2 - 3" 600 Grit sanding disc 2 - 3" 1000 Grit sanding disc 10 - 1-1/2" 2000 Grit sanding disc 2 Spanner wrenches

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST3055 3" Mini Air Polishing Kit

- 2,500 rpm
- Kit includes: 1 - 3" Mini Polisher (#3043), 1 - 3" Sanding /Polishing Back-up Pad (#20302P), 1 - 3" Wool Buffing Pad (#20303), 1 - 3" Polishing Foam Pad - Yellow (#20306), 1 - 3" Polishing Foam Pad - White (#20306W)

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST331 ONYX 3" 2500RPM Geared Palm Polisher Kit

- High quality air motor provides high power, durability, and reduced vibration
- Planetary-gear system with needle bearings for power and long term working
- Rear exhaust with silencer for quiet and clear operation
- Insulating thermo rubber against cold and for good grip
- Built-in regulator for any speed

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SUNEX[®] TOOLS



SUNSX8200 Surface Blaster Kit

- Complete rust, paint, and pin stripe removal tool
- 180° rotating handle • Planetary gear system
- Comes with: Surface Blaster tool, Rubber Eraser Wheel, Pin Strip Stripping wheel, Hub and 3 Wire wheels
- Increased torque to power through tough materials
- 2 year warranty

Astro



AST3059 Headlight Restoration and Wheel and Parts Polishing Kit

- Ideal for restoring aluminum and magnesium rims, engine parts, motorcycle parts and plastics (1800 RPM's)
- Easily removes clear coats from weathered wheels
- Creates CUSTOM looks on parts by giving them a polished or a flat finish
- Restores damaged polycarbonate headlamps (Must use tool at low rpm - 1800 max for plastic)
- Quickly restores weathered headlamps without removing from car

Kit includes: Aluminum storage case, Variable speed Quick Coupler Air Buffer 0-3000 RPM (AST3059A), 3" Scuff Mushroom Shaped Buff (AST3059-01), 4" Scuff Mushroom Shaped Buff (AST3059-02), 3" 100 percent Cotton Mushroom Shaped Buff (AST3059-03), 4" 100 percent Cotton Mushroom Shaped Buff (AST3059-04), 3" 100 percent Cotton Tapered Buff (AST3059-05), 2" 100 percent Cotton Drum Buff (AST3059-06), Brown Rouge (AST3059-07), White Rouge (AST3059-08), Blue Rouge (AST3059-09)

AIR SAWS



IRT429

Heavy Duty Air Reciprocating Saw

- Excellent for body shop repair, muffler and exhaust work, and sun roof installations
- Reduced vibration
- Cuts flat and curved surfaces
- Durable, long-life tool

A versatile air saw for cutting intricate shapes and light radius curves in all types of plastics, fiberglass, and composite materials, as well as aluminum and sheet metal.



IRT529

Reciprocating Air Saw - Low Vibration

- Patented vibration reduction device reduces hand fatigue - 88% reduction in vibration
- Composite grip for improved comfort during extended use
- Small, lightweight design provides greater accessibility
- Adjustable rear exhaust directs air away from the work-piece
- Includes (6) blades

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DYBR51

Nitro Series Reciprocating Saw

- A versatile tool used for cutting sheet metal, piping and plastic panels
- Lightweight and easy to maneuver saw.
- Compact, lightweight tool design permits easy use over long periods of time
- Tactile, thermoplastic rubber tool grip reduces cold air transmission
- Rear positioned 360 degree rotatable side exhaust
- Includes safety-lock lever



CPT7901

Super Duty Reciprocating Air Saw

- Power at 10,000 strokes per minute
- Lock off throttle for protection against accidental start ups
- Adjustable guide offers flexibility in setting depth of cut
- Ergonomic design for comfort and easy handling

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MADE IN JAPAN

SPJSP-7610

Recipro Saw (Gear Type)

- Powerful enough to cut steel, FRP, rubber and resin objects such as bumpers, etc.
- Swivel air inlet and rear air exhaust
- Designed with a 0.47" stroke and operates at 5,300 strokes per minute
- Equipped with safety lever, blade guide, and air regulator
- Durable and high quality construction expertly made in Japan

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST936

ONYX Gear Driven Heavy Duty Air Saw

- Industry leading gear-driven design with 250% more cutting capacity than standard air saws
- Cut quicker and thicker up to 1/4" (6.4mm) mild steel
- Accepts universal 1/2" shank standard saw blades
- Strokes per Minute: 7,000
- Avg. Air Consumption: 4.0 CFM

AIR SPECIALTY TOOLS



CPT7125 Pistol Needle Scaler

- Rubber sleeve on handle for better comfort
- Delivered with 2 sets of needles: 19 x 1/8" (3 mm) and 29 x 5/64" (2 mm) for finer usage
- Great for rust or paint removal

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7120 General Purpose Needle Scaler

- Adjustable sleeve to fit protrusion of the needles to the task to be performed
- 19-1/8" steel needles with high resistance to wear
- Easily converts to chisel scaler • 4,800 BPM

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT835 Heavy Duty Air Nibbler

- 2,750 strokes per minute • Four optional cutting positions
- Rugged nibbling head and .177" diameter punch cuts steel up to .060" (16 gauge) and aluminum up to .102" (10 gauge)
- Easy access to punch and die for quick replacement

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT9160 Engraving Pen

- Very quiet engraving pen with an integrated 6.5 ft (2 m) hose
- High blows per minute at 32,400 BPM
- Fine point stylus for precise engraving
- Low air consumption at only 1.69 CFM

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



- KTI89275
Needle Scaler Standard Duty**
- 3,500 blows per minute with an extra kick
 - Teasing trigger
 - Independent power regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTI89257 Straight Line Needle Scaler

- Straight line needle scaler with lever throttle
- 3500 RPM, 4000 bpm, average air consumption 3.5cfm, air inlet 1/4", air hose 3/8"
- 3mm diameter needles, 6" needle length, 19 needles included
- Bore diameter 1" • Tool length 18"
- Repairable up to 1-Year

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTI83280 Weld Flux Needle Scaler

- Converts to a standard scaler in seconds
- Simple "J" slot adjustment for needle wear or to provide more needle exposure
- Positive lock retainer

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT125 Standard Duty Needle Scaler

- 19 needles
- Each needle: 1/8" (3.2mm)
- 4,600 blows per minute at free speed

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR SPECIALTY TOOLS



DYBNZ1K NITRO SERIES NitroZip Surface Preparation Tool Kit

- Dynabrade Nitro Series NitroZip tool outperforms conventional spiral-wound wheels without clogging
- Excellent power for effectively removing seam sealer and paint
- Tool duplicates sand-blasting effect without surface fatigue
- Excellent for removing two-sided adhesive molding tape and decal material with use of rubber eraser wheel
- Eraser wheel has serrations for improved cooling effect air flow
- Also resists heatbuildup and reduces jumping and vibration
- Kit includes: Standard Tool, 1/2" Wheel Hub Assembly, 1/2" Coarse Wire Wheel, 3/4" Wheel Hub Assembly, 3/4" Coarse Wire Wheel and RED-TRED® Zip Eraser Wheel

DYBNZ1 NITRO SERIES NitroZip Surface Preparation - Tool ONLY



DYB18256 Dynazip Air Tool Kit

- Excellent power and torque at 3,200 RPM for removing rust etc.
- Dramatically outperforms conventional spiral-wound wire wheels without clogging
- Quick and easy accessory change
- Tool duplicates sand-blasting effect without surface fatigue and provides ultimate contour adaptation
- Straight line motor with rear exhaust
- 1 Year warranty

DynaZip Versatility Kit includes: 18255 DynaZip Tool, 92244 Coarse Wire Wheel (1/2" wire bristle width x 3/4" wide band), 92245 Coarse Wire Wheel (3/4" wire bristle width x 3/4" wide band), 92255 Eraser Wheel, 92284 Wheel Hub Assembly.



AST232 ONYX Pinstripe Removal Kit

- Specialty tool developed for the removal of pinstripes, adhesives, double faced tapes and moldings with ASTRO'S Smart Eraser® Pads
- 12 piece Smart Eraser Pads - 4" pads made of molded rubber with 5/16" arbor
- Fast and easy • Patented

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST500ARS Onyx Adhesive Removal System, Tool and Pad

- The Adhesive Removal System was developed for the quick and easy removal of pinstripes, adhesives, double-sided tape, and moldings
- The Adhesive Removal Tool has two speeds: 2,000 rpm for removal of pinstripes and 4,000 rpm for the more stubborn double sided tape and decal removal
- Includes a 500E Rapid Eraser Pad, which is designed for tougher projects that require a more aggressive eraser

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT324 Pinstripe Remover Tool with 12 Eraser Pads

- 3700 rpm max free speed
- Rear exhaust
- Arbor 5/16" - 24 with 4" pad diameter



IRT324-1 Pin Stripe Removal Tool with 1 Eraser Pad

AIR SPECIALTY TOOLS



KT189110A

Air Hydraulic Rivet Gun 3/16"

- Blind Rivet Setting Capacity: 3/16" (4.8mm), 5/32" (4mm), 1/8" (3.2mm), 3/32" (2.4mm)
- Air Inlet: 1/4" NPT; Hose Size: 3/8" (10mm) ID; Traction Power: 1940 lbs; Stroke Length: 0.551" (14mm); Recommended Air Pressure: 90 PSI
- Performs well at any angle
- Powerful durable, high speed production tool
- Low vibration and low noise level
- Covered by a 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT189115A

Air Hydraulic Rivet Gun 1/4"

- Blind Rivet Setting Capacity: 1/4" (6.4mm), 7/32" (5.6mm), 3/16" (4.8mm), 5/32" (4mm), 1/8" (3.2mm), 3/32" (2.4mm)
- Air Inlet: 1/4" NPT; Hose Size: 3/8" (10mm) ID; Traction Power: 3055 lbs; Stroke Length: 0.551" (14mm); Recommended Air Pressure: 90 PSI
- Quick release air valve permits cylinder to return quickly for high speed assembly operations: Prevents overloading for long life
- Powerful durable, high speed production tool
- Performs well at any angle • Covered by a 1 Year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Pneumatic Pilot Punch

- Used with a pneumatic tool • Heavy duty S2 steel
- Black oxide finish for additional rust protection

Roll pin punches are used to drive out roll pins or spring pins. These punches are the only way to remove and re-use roll or spring pins without causing damage to the pins. Because of the hollow, thin wall construction of a roll pin, a standard pin punch will often collapse, mar or distort the end of the pin or be driven into and jammed inside the hollow core of the roll pin. Roll pin punches are designed with a small projection in the center of the pin tip to support the circumference of the roll pin.

MAY31950 - #8 1/4" **MAY31951** - #9 5/16"
MAY31952 - #10 3/8" **MAY31953** - #11 7/16"
MAY31954 - #12 1/2"



KT189218

Air Shear Cutter

- Cut up to 180" per minute
- 18 gauge capacity • 360° head rotation
- Pistol grip • Through handle exhaust
- Variable speed control
- Full ball bearing construction
- Hardened planetary gear system

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MALTSHD1

TurboShear Heavy Duty™

Automotive Shears Drill Attachment

- Use with minimum 14.4 volt 3/8" (9.53 mm) Cordless or Corded Drill
- Cuts straight and to the left including round and square auto body patches
- Telescoping drill clamp
- Wide-opening jaws also navigate thick plastic bumper profiles, rocker panels and layered metal



MALDHT1

Turbo-X-Tools Hemming Drill Attachment

- Hem door skins with speed and precision
- Attaches to standard corded or cordless drill
- Will not mar or scratch door skin finish
- Resistant to solvents
- Safe, controlled operation

AIR BLOW GUNS



DENDF-BG602

Mini Blow Gun, Rubber Tip

- Perfect air tool for removing loose materials from crevasses and tight spaces
- Rubber tip provides a concentrated stream of air
- Includes carabiner for hooking onto a belt loop
- Small enough to fit in a pocket and carry around all day
- Easy one button thumb operation



DENDF-BG601

Mini Blow Gun, Venturi Tip

- Venturi Tip speeds up the main air flow by drawing ambient air from the side ports increasing velocity and volume
- Boosts the available thrust up to 250%
- Ergonomic hand-held design
- Includes carabiner for hooking onto belt loop
- Fits into pocket for quick access



ACMA680CS

1/4" NPT Typhoon® Blow Gun with High Flow Tip

- Delivers up to 34 CFM at 125PSI
- Meets or exceeds OSHA regulations
- Maximum flow for easy clean-up and blow off
- Lightweight and ergonomic at 6.2 oz.
- Variable flow trigger for controlled blow off



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ACMA681CS

Typhoon Pro Blow Gun

- Most powerful blow gun in its class
- Tough all-metal design for hardcore users
- Chrome plated, resists chemical and solvents
- Easily manipulate air flow: variable control trigger



AMF201

Blow Gun, Rubber Tipped

- Provides leak proof seal for blowing out lines
- Rubber tip is excellent for body shops as it will not mar painted surfaces



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



VAC72-020-1050

4" Full Flow Blow Gun

- Flow is precise and easily regulated - a wide range of lengths and accessories
- High blowing force - connection in plastic to reduce the tightening torque
- Lightweight design - durable construction
- Quieter disconnection - lower noise levels
- Modern ergonomic, comfortable grip



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

VAC72-020-1150

13" Full Flow Blow Gun with Straight Tube

- Flow is precise and easily regulated
- High blowing force
- Lightweight design
- Quieter disconnection
- Modern ergonomic, comfortable grip



VAC72-020-1160

13" Full Flow Blow Gun with Bent Tube

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

VAC72-020-1250

20" Full Flow Blow Gun with Straight Tube

VAC72-020-1260

20" Full Flow Blow Gun with Bent Tube

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST1716

Deluxe Air Blow Gun with 20" Long Angled Nozzle with 1/2" Removeable Rubber Tip

- Improved valve design makes this blow gun more convenient, faster, and easier to use for all applications
- Comfortable lever control and insulated handle
- High impact plastic body with built-in hanger slot
- Brass air inlet, air inlet thread: 1/4" NPT; air pressure: 90-120 psi; temperature range: -40 to 80° C



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR BLOW GUNS



OSHA Metal Tip Blowgun with 1/4 Body Profile

- OSHA compliant blowgun with metal nozzle
- Durable metal tips
- Triggers are color coded to match Prevost button colors
- 1-year Warranty against manufacturing defects

Non-OSHA Metal Tip Blowgun with 1/4 Body Profile Plug

- Standard model blowgun with metal nozzle
- Non scratch composite or durable metal tip
- Triggers are color coded to match Prevost button colors
- 1-year Warranty against manufacturing defects

Part #	OSHA Compliant	Color/Connector
PRVEBG07MTLH	Yes	Green - Prevost High Flow
PRVEBG07MTL	No	Green - Prevost High Flow
PRVABG06MTLH	Yes	Yellow - Prevost ARO 210
PRVABG06MTL	No	Yellow - Prevost ARO 210
PRVUBG06MTLH	Yes	Red - Prevost Industrial
PRVUBG06MTL	No	Red - Prevost Industrial
PRVIBG06MTLH	Yes	Blue - Prevost Industrial
PRVIBG06MTL	No	Blue - Prevost Industrial



CRD63050

Truckers Air Seat Blow Gun Kit

- Nylon 12' hose, coiled, burst pressure up to 120 PSI
- Zinc alloy blow gun, includes 2 replacement nozzle/heads with brass fittings
- 1/4" NTA air line tee • Meets DOT Standards
- SAE approved



Safety Extensions Blo-Gun

- OSHA approved multi-function blo-gun comes with both a safety nozzle and rubber tip nozzle
- Extension is bent to access hard to reach areas such as motors, machinery, transmissions, combines and hidden areas
- Maximum working pressure: 150 PSI
- OSHA compliant with safety tip only

MIL159 - 4'

MIL158 - 2'

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS148

Compact Safety Lever Blo-Gun

- Compact and versatile blo-gun comes with both a safety nozzle and rubber tip nozzle
- Zinc die-cast body • 1/4" NPT inlet
- Maximum working pressure: 150 PSI
- OSHA compliant with safety tip only

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS150

Full Flow OSHA Lever Blow Gun

- Maximum working pressure: 150 PSI
- SCFM 10.0 @100 PSI
- 1/4" NPT air inlet, nozzle thread size: 7/16" - 27
- Body outlet thread size: 1/2" - 27
- OSHA compliant

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS153

Rubber Tip Blow Gun

- For positive leak-proof connection when blowing out any fluid lines
- A must where metal tip could mar delicate finish in molds or fresh paint
- 1/4" NPT air inlet, with rubber tip

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS154

Lever Rubber Tip Blow Gun with Bent Tip

- 1/4" NPT Air inlet
- Rubber tip
- 45° bent tube is ideal for automatic transmissions

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR BLOW GUNS



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS120

OSHA Safety Lever Blow Gun with Hang Up Hook

- Use anywhere with compressed air
- Full flow control
- Extra large hang-up hook for easy storage
- Maximum inlet pressure: 150 PSI
- Maximum nozzle pressure: 30 PSI when dead ended



Adjustable Aluminum Pocket Blow Gun

- Knurled grip for secure handling
- Maximum inlet pressure: 150 PSI
- SCFM 15.9 @ 100 PSI
- All pocket blo-guns include a pocket clip



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS115 - M-style

- Fits M-Style or any 1/4" Industrial style coupler

MILS117 - T-style

- Fits T-Style or any 1/4" Tru-Flate/Parker style coupler

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS116 - A-style

- Fits A-Style or any 1/4" Aro 210 style coupler



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MIL151

Blow Gun Control Valve

- Maximum working pressure: 150 PSI
- SCFM: 24.5 @ 100 PSI
- Female 1/4" NPT inlet x 1/4" NPT outlet
- Zinc alloy body, stainless steel spring, synthetic washer
- Maximum temperature: 200 degrees F



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MIL152

Rubber Tip for Blo-Guns

- For use where leak proof connection is required when blowing out fluid lines
- O ring seals create an air-tight connection
- Rubber tip will not mar delicate finish in molds or paint
- Dual thread design permits use on all blo-guns with 7/16"-27 and 1/8" NPS



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS157

Siphon Spray Blow Gun Kit

- Siphon Spray Blo-Gun Kit
- 1/4" NPT Air Inlet
- Complete with 8' of tubing and vinyl storage pouch
- SCFM 13.7 @ 100 PSI



AIR TOOL LUBRICANTS/OILERS



BLP16-404ATC-EA

Air Tool Oil and Conditioner - 12 oz.

- A fast and easy way to clean, coat and lubricate the internal parts of all air operated tools

BLP16-404ATC

Air Tool Oil and Conditioner 11 oz. (12 Per Case)



SGT98500

In-Line Automatic 1/4" NPT Air Tool Oiler

- Automatically lubricates air tools as they are being used
- High quality aircraft aluminum stem, precisely machined to 1/4" NPT



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT10Z4

4 oz. Air Tool Oil

- Prevents rust formation
- Provides positive lubrication
- Dissolves gum and sludge that cut down tool speed and reduce power output



IRT105-1LB

Impact Tool Grease - 1lb.

IRT105-4T

Impact Tool Grease - 4 oz. Tube



AMF1220-1

Air Tool Oil, Pint

- Light pneumatic tool oil
- 92 SUS at 75° F



AIR FITTINGS



Professional Duty Reusable Brass Fittings for BluBird® Air Hoses

- Heavy duty brass construction - resists corrosion, ductility to high temperatures & low magnetic permeability
- 1/4" and 3/8" FastFix® fittings have 1/4" NPT ends
- Easy installation • Working pressure: 300 PSI
- Covered by a 6 month warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FastFix® Air Hose Assembly Repair Swivel

Part #	Description	
BLBFFSW14	1/4"	1/4" NPT ends
BLBFFSW38	3/8"	1/4" NPT ends



FastFix® Air Hose Assembly Repair Splicers

Part #	Description	
BLBFFSP14	1/4"	1/4" NPT ends
BLBFFSP38	3/8"	1/4" NPT ends
BLBFFSP12	1/2"	



FastFix® Air Hose Assembly Repair Fittings

Part #	Description	
BLBFFFX14	1/4"	1/4" NPT ends
BLBFFFX38	3/8"	1/4" NPT ends
BLBFFFX12	1/2"	1/2" MNPT



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

V-Style Coupler and Plug Kits

- Scratch resistant steel design in an anodized coating
- Provides up to 70% more airflow for optimal power to your air tools and applications



MILS-303VKIT
3 Piece Coupler and Plug Kit
• Includes 1 male plug, 1 female plug and 1 female coupler



MILS-307VKIT
7 Piece Coupler/Plug Kit
• Includes 3 male plugs, 2 female plugs, 1 male coupler and 1 female coupler



MILS213 5 Piece A-Style 1/4" Coupler and Plug Kit

- A-style couplers are push type
- Steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MILS642

Hose Mender, 3/8" ID Hose

- 3/8" hose inside diameter
- Barb type construction that provides a secure grip on the hose inside diameter



MILS-657

1/4" Air Hose, Swv. Connector

- 1/4" Female national pipe thread
- Maximum inlet pressure of 150 pounds per square inch
- Air flow 40 standard cubic feet per minute



Basic Size Tru-Flate Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
MILS1803	"P Style" Coupler	Female	1/4"	3/8"	1/Pk
MILS1805	"P Style" Coupler	Female	3/8"	3/8"	1/Pk
MILS1809	"P Style" Plug	Male	1/4"	3/8"	2/Pk
MILS785	"T Style" Coupler	Female	1/4"	1/4"	1/Pk
MILS783	"T Style" Plug	Male	1/4"	1/4"	2/Pk
MILS784	"T Style" Plug	Female	1/4"	1/4"	2/Pk
MILS786	"T Style" Coupler	Male	1/4"	1/4"	2/Pk
MIL1859	"G Style" Plug	Male	3/8"	1/2"	5/Pk
MIL1816	"G Style" Coupler	Male	1/2"	1/2"	1/Pk
MILS1815	"G Style" Coupler	Female	1/2"	1/2"	1/Pk
MILS1816	"G Style" Coupler	Male	1/2"	1/2"	1/Pk
MILS1817	"G Style" Plug	Male	1/2"	1/2"	1/Pk
MILS1818	"G Style" Plug	Female	1/2"	1/2"	1/Pk



MILS782 - 1/4" Coupler Plug Kit (Includes (1) MILS783 and (1) MILS785)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR FITTINGS

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Basic Size Tru-Flate Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
PRVURC061201	Coupler	Female	1/4"	1/4"	1/Pk
PRVUSC061201	Safety Coupler	Female	1/4"	1/4"	1/Pk

prevost



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Basic Size Industrial Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
MILS1835	"H Style" Coupler	Female	3/8"	3/8"	1/Pk
MILS1839	"H Style" Plug	Male	1/4"	3/8"	2/Pk
MILS715	"M Style" Plug	Female	1/4"	1/4"	1/Pk
MILS716	"M Style" Plug	Male	1/4"	1/4"	1/Pk
MILS727	"M Style" Plug	Male	1/4"	1/4"	2/Pk
MILS-727-5	"M Style" Plug	Male	1/4"	1/4"	5/Pk
MILS728	"M Style" Plug	Female	1/4"	1/4"	2/Pk
MILS733	"M Style" Plug	Male	3/8"	1/4"	1/Pk

MILTON



MILS711 - Quick Change Coupler Assembly (Includes (1) MILS715 & (1) MILS727)

MILS211 - 5 Piece 1/4' NPTM-Style Coupler Kit (Includes (1) MILS715, (3) MILS727 and (1) MILS728)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
PRVIRC061201	Coupler	Female	1/4"	1/4"	1/Pk
PRVIRC061251	Coupler	Male	1/4"	1/4"	1/Pk
PRVIRC081202	Coupler	Female	3/8"	3/8"	1/Pk
PRVISC061201	Safety Coupler	Female	1/4"	1/4"	1/Pk
PRVISG111203	Safety Coupler	Female	1/2"	1/2"	1/Pk

prevost



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Basic Size Lincoln Style Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
MILS790	"L Style" Coupler	Female	1/4"	1/4"	1/Pk
MILS791	"L Style" Plug	Male	1/4"	1/4"	2/Pk
MILS792	"L Style" Plug	Female	1/4"	1/4"	2/Pk

MILTON



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Basic Size ARO Style Interchange Series Air Couplers


Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
LIN13329	Coupler	Female	1/4"	1/4"	1/Pk
PRVARC061201	Coupler	Female	1/4"	1/4"	1/Pk

LINCOLN

prevost



AIR FITTINGS

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Basic Size ARO Style Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
MILS775	"A Style" Coupler	Female	1/4"	1/4"	1/Pk
MILS776	"A Style" Coupler	Male	1/4"	1/4"	2/Pk
MILS777	"A Style" Plug	Male	1/4"	1/4"	2/Pk
MILS778	"A Style" Plug	Female	1/4"	1/4"	2/Pk

MILTON



MILS213 - 5 Piece 1/4" NPTA-Style Coupler Kit (Includes one MILS775, three MILS777 and one MILS778)

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

High Flow Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
MILS-761	"V Style" Plug	Female	1/4"	1/4"	2/Pk

MILTON

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
PRVERC071201	"Euro Style" Coupler	Female	1/4"	1/4"	1/Pk
PRVERP076201	"Euro Style" Plug	Female	1/4"	3/8"	1/Pk
PRVERP076251	"Euro Style" Plug	Male	1/4"	3/8"	1/Pk

prevost



 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

LEGA53458FZ - 14 Piece Flexzilla Pro High Flow Coupler and Plug Kit - 1/4" NPT

• Kit includes: (2) FNPT Coupler, (2) MNPT Coupler, (4) FNPT Plug and (6) MNPT Plug

LEGA53457FZ - 7 Piece Flexzilla Pro High Flow Coupler and Plug Kit - 1/4" NPT

• Kit includes: (1) FNPT Coupler, (1) MNPT Coupler, (2) FNPT Plug and (3) MNPT Plug

LEGA53452FZ - 3 Piece Flexzilla Pro High Flow Coupler and Plug Kit - 1/4" NPT

• Kit includes: (1) FNPT Coupler, (1) FNPT Plug and (1) MNPT Plug

Legacy FLEXZILLA PRO



 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Mega Flow Composite Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
ACMA923MB4M	Coupler	Male	1/4"	1/4"	1/Pk
ACMA923MB4F	Coupler	Female	1/4"	1/4"	1/Pk



 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Ball Swivel Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	MPT Size	Connector	Per Package
ACMA937N4BS	"M Style"	Male	1/4"	1/4"	1/Pk
ACMA918N4BS	"A Style"	Male	1/4"	1/4"	1/Pk
ACMA925N4BS	"T Style"	Male	1/4"	1/4"	1/Pk

Acme



ACMA923MN4F - 1/4" Mega Flow Female Connector

ACMA923MN4M - 1/4" Mega Flow Male Connector



Acme

AIR FITTINGS

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MIL5760-1

Hi-Flo V-Style 1/4" MNPT Steel

- Air flow of 74 standard cubic feet per minute
- Push type sleeve release • Max. temp.: 250° F



MIL5755

1/4" NPT Female M-Style Coupler

- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- M-style coupler bodies are brass with brass sleeves
- Push type, steel sleeve, drag guard • Air flow: 40 SCFM
- 1 year warranty on material and workmanship



MIL783BK

1/4" Male Plug T-Style

- 1/4" male national pipe thread
- Maximum 300 pounds per square inch



MIL5600

Male Brass Hose End - 2 Pack

- Hose ID: 1/4" • Thread 1/4" NPT
- 1 year warranty on material and workmanship



MIL1818

1/2" NPT Female G-Style Plug

- Case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F • Air flow: 99 SCFM
- 1 year warranty on material and workmanship



MIL1858

1/2" NPT Female G-Style Plug

- Case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F • Air flow: 99 scfm
- 1 year warranty on material and workmanship



MIL1857

1/2" NPT Male G-Style Plug

- Case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250 °F • Air flow: 99 scfm
- 1 year warranty on material and workmanship



MIL1654-6

1" x .656 I.D. Brass Hole Ferrule

- Hose OD: 21/32"
- 1 year warranty on material and workmanship




MIL731

Re-Cappers F. Plug M-Style

- Maximum inlet pressure of 300 pounds PSI
- 40 standard cubic feet per minute
- Maximum temperature of 250°F



 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



High Flow Couplers & Plugs

- Twice The Flow – When compared to standard interchanges!
- Provides maximum Torque • Provides Maximum RPM
- Increased efficiency • Maximum pressure 300 PSI
- Easy push-to-connect couplers • 1/4 in. body

Flexzilla High Flow Coupler

- Steel / Aluminum*

LEGA53416FZ - 1/4" FNPT

LEGA53616FZ - 3/8" FNPT

LEGA53426FZ - 1/4" MNPT

* Nickel Plated Steel with Anodized Aluminum Sleeve



2 Pack Flexzilla High Flow Plugs

- Nickel Plated Steel

LEGA53430FZ-2PK - (2) 1/4" FNPT

LEGA53630FZ-2PK - (2) 3/8" FNPT

LEGA53640FZ-2PK - (2) 3/8" MNPT



LEGA53657FZ

7 Piece Flexzilla High Flow Coupler And Plug Kit - 3/8 in. NPT

- Kit includes: (1) FNPT Coupler, (1) MNPT Coupler, (2) FNPT Plug and (3) MNPT Plug



PRVURC081202

3/8" Female Automotive FNPT Coupler

- Non scratching, heavy duty, composite body
- Operating pressure : 0 to 174 psi
- Temperature : +5°F to +158°F
- Flow rate at 6 bar :69 cfm (?p = 8.70 psi)
- Lifetime warranty does not cover abuse



PRVURC061251

1/4" Automotive 1/4" MNPT Coupler

- Lifetime warranty does not cover abuse



PRVIRP066201

1/4" Female NPT Industrial Plug

- Fits IRC 061201 • Treated Steel
- Corrosion-proof treatment




LIN11659

"Long Stem" Air Nipple

- 250 PSI maximum operating pressure • 1/4" NPT inlet
- Maximum air flow: 52 scfm at 100 psi
- 1 year warranty on material and workmanship



PRODUCT IDENTIFICATION GUIDE



Coupling & Plug Identification

PART NUMBER
EXAMPLE: **PRVURC061201**

PRV	U	R	C	06	1	2	01
COMPANY CODE PREVOST	PROFILE A: ARO 210 E: HIGH FLOW I: INDUSTRIAL (ISO B) U: AUTOMOTIVE/TRUFLATE	BUTTON STYLE S: SAFETY R: REGULAR	BODY TYPE I: <i>prevoS1</i> C: COMPOSITE P: PLUG G: GRIP	BODY SIZE 06: 1/4" 07: 3/8" 08: 3/8" 11: 1/2"	FITTING TYPE 1: COUPLING 6: PLUG	THREAD TYPE 2: NPT	THREAD SIZE 01: 1/4" FEMALE 02: 3/8" FEMALE 03: 1/2" FEMALE 51: 1/4" MALE 52: 3/8" MALE 53: 1/2" MALE



FLEXAIR

HYBRID FLEXIBLE SHOP HOSE

Lightweight and easy to handle but rugged enough to stand up to the toughest environments

- Hybrid material: Polyurethane, Rubber and PVC blend
- Paired with your choice of prevoS1 coupling and plug
- Arrives fully assembled
- Anti-scratch
- Kink resistant
- Bend restrictors at each end
- Lays flat, and easy to coil

Quickly identify your FLEXAIR

PART NUMBER
EXAMPLE: **PRVRSTRUSB3835**

PROFILE STYLE

A: ARO 210
E: High Flow
I: Industrial
U: Auto/Truflate

HOSE ID

14: 1/4"
38: 3/8"

HOSE LENGTH

25: 25'
35: 35'
50: 50'

AIR COMPRESSORS



2 STAGE AIR COMPRESSORS						
Part Number	HP	CFM	Voltage	Tank	Configuration	Start-Up Kit
Value Packages						
IRTC2340L5	5	14.7	230/1/60	60	Vertical	32305880
IRTC2475N7.5	7.5	24	230/1/60	80	Vertical	32305880
Premium Packages						
IRTC2475N7.5FP	7.5	24	230/1/60	80	Vertical	32305880



IRTC2340L5



IRTC2475N7.5FP



IRTC2475N7.5

AIR TOOLS



IRTC2475F13GH

Two-Stage

Gas Powered Air Compressor - Honda Engine

- Durable cast iron for 100% continuous duty application
- Extended 2 year warranty when used with Ingersoll Rand's All Season Select synthetic lubricant
- Advanced safety features including low oil-level shutdown for gas engines



IRT2475F14G

14 HP Gas Drive

Air Compressor - Kohler Engine

- 30 gallon tank
- 14HP Kohler Engine, 25 CFM @ 175 PSI
- Alternator Charging System included
- Electric ignition and pull cord operation
- Two-Year warranty on pump with purchase of IR Start up Kit

IRT46821567

Start Up Kit for Air Compressor Model 2475F14G

- Purchase of Start Up kit increases pump warranty to 2 years
- Includes oil and air filter elements for the first year of operation



AIR COMPRESSORS



IRT46821344

14 HP Gas Drive Air Compressor - Kohler Engine

- 14HP Kohler Engine, 25 CFM @ 175 PSI
- 30 gallon tank - great for truck-mounting
- Alternator Charging System included
- Electric ignition and pull cord operation
- Two-Year warranty on pump with purchase of IR Start up Kit
- Repair only up to 1 yr



IRTCS3L3

Single Stage Electric Powered 3 HP Air Compressor

- 60 gallon vertical tank • Maximum operating pressure: 135 PSI
- 230/1/60, nominal amp draw motor: 6.5 electric
- ASME receiver size: 60
- 11.3 CFM at 90 PSI • 10.3 CFM at 135 PSI



IRTUP6-7.5-150

ROTARY SCREW AIR COMPRESSORS

Part Number	HP	CFM	Max PSI	Voltage	Tank
Standard Packages					
IRTUP6-7.5-150	7.5	25	150	230/1/60	80
IRTUP6-10-150	10	34	150	230/3/60	80
IRTUP6-15C-150	15	50	150	230/3/60	80
Total Air System Packages					
IRTUP6-7.5TAS-150	7.5	25	150	230/1/60	80
IRTUP6-10TAS-150	10	34	150	230/3/60	80
IRTUP6-15CTAS-150	15	50	150	230/3/60	120



IRT47624236001

Compressor UP6S-30TAS-125 460V/3PH/60 30HP

- 30 HP • Max pressure: 125 PSI
- 120 gallon tank mounted
- 460 Volts, 3 Phase, 60 Amps
- 1 yr warranty on material and workmanship

AIR COMPRESSORS



EMXIS07V080Y1 7.5 HP, 80 Gallon

Vertical Air Compressor

- Whisper100 noise suppression system, dissipates noise up to 25%
- Aftercooler system
- Low RPM Two stage pumps
- 80 Gallon ASME Tank
- 7.5 HP, 2 Stage, Single Phase

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



EMXIS05V080Y1

5HP, 80 Gallon, Vertical Air Compressor

- Whisper100 noise suppression system, dissipates noise up to 25%
- Aftercooler system
- Low RPM Two stage pumps
- 80 Gallon ASME Tank
- 5 HP, 2 Stage, Single Phase

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



EMXEPV10V080V13

10HP Vari Industrial Plus Silent Compressor

- Variable speed single phase smart air compressor
- Dual control • Low oil shutdown
- VSD • Hour meter
- Whisper 100 noise suppression system
- Call vendor for warranty



EMXHP02P010SS

Hulk by EMAX 2HP Silent Air Portable Compressor - 10 Gallon

- 41 dB @ 3 FT
- Low RPM motor with solid copper windings
- 2 cylinder commercial grade pump, faster recovery time, more CFM production Oil Free, allows for use in cold weather, no oil in lines, no oil maintenance
- Oil free, allows for use in cold weather, no oil in lines, no oil maintenance
- Stainless steel transfer tubes

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



EMXHP02P020SS

Hulk by EMAX 2 HP Silent Air Portable Air Compressor - 20 Gallon

- 41 dB @ 3 FT
- Low RPM motor with solid copper windings
- 2 cylinder commercial grade pump, faster recovery time, more CFM production Oil Free, allows for use in cold weather, no oil in lines, no oil maintenance
- Oil free, allows for use in cold weather, no oil in lines, no oil maintenance
- Stainless steel transfer tubes

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR COMPRESSORS

FLEXZILLA



- LECFXS07V080V1**
7.5HP, 80 Gallon, 1 Phase,
Vertical Air Compressor
- Flexzilla Pro Air Quiet Vertical Air Compressor
 - 7.5 Horse Power
 - 2 Stage



Let's face it, standard air compressors are LOUD. All this NOISE interferes with workplace communication, lowers productivity on the job, and increases risk of hearing loss. Fortunately, Flexzilla® brings quiet back to the workplace.



- LECFXS10V080V1**
10HP, 80 Gallon, 1 Phase,
Vertical Air Compressor
- Flexzilla Pro Air Quiet Vertical Air Compressor
 - 10 Horse Power • 80 Gallon
 - 1 Phase • 2 Stage
 - Call vendor for warranty



Face it, standard air compressors are LOUD. All this NOISE interferes with workplace communication, lowers productivity on the job, and increases risk of hearing loss. Fortunately, Flexzilla® brings quiet back to the workplace.



- KT189021**
1-Gallon, 3HP Oil Free
Pancake Air Compressor
- Induction motor
 - 1/3 HP
 - Maximum pressure: 100 PSI
 - 120 Volt / 60 Hz, 3 Amp
 - 1 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



- KT189023**
3-Gallon, 3HP Oil Free
Horizontal Air Compressor
- Induction motor
 - 3 Horsepower
 - Maximum pressure: 100 PSI
 - 120 Volt / 60 Hz, 3 Amp
 - 1 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



- MTMAM1-PH65-08M**
8 Gallon Gas Air Compressor
- 13.9 CFM @ 90 PSI • 196cc Honda OHV
 - Single stage cast iron pump
 - Pneumatic engine idle control
 - Call vendor for warranty



The Mi-T-M 8-gallon single stage gasoline air compressor supplies more power than what a standard tool can deliver and is the ideal air compressor for construction applications.

AIR COMPRESSORS

BelAir
COMPRESSORS



IMC318VN

5 HP 80 Gallon

Vertical Two Stage Electric Reciprocating Air Compressor

- Start-Stop pressure switch control
- 18.5 cfm @100 PSI
- Tank drain and discharge valve
- 208-230 volt, single phase
- ASME safety valves fully enclosed belt guard
- 2 year full warranty



5 HP Vertical Two Stage Electric Air Compressor

- 208-230 volt single phase
- 2 year full warranty
- Start-stop pressure switch control
- 15.3 cfm @100 PSI
- ASME safety valves fully-enclosed belt guard
- Tank drain and discharge valve

IMC216V - 60 Gallon

IMC218V - 80 Gallon



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IMC318VL

7.5 HP 80 Gallon

Vertical Two Stage Electric Air Compressor

- Start-Stop pressure switch control
- 25.3 cfm @ 100 PSI
- ASME safety valves fully-enclosed belt guard
- Tank drain and discharge valve
- 208-230 volt, single phase
- 2 year full warranty



BelAir
COMPRESSORS



IMC3G3HHL

13 HP Honda Two Stage Engine Powered Compressor

- 12 volt electric and recoil start
- 25.25 cfm @ 175 PSI
- Unique E-Z pull tank drain
- Fully enclosed belt guard
- 12 volt charging system
- 44-1/2" L x 19" D x 45" H
- Shipping weight: 369 lbs.
- 2 year warranty

Engine slowdown, ASME safety valves, tank discharge valve, start key/panel, oil monitor, and a 30 gallon horizontal ASME tank.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IMC3G3HKL

14 HP Two Stage Engine-Powered Reciprocating Air Compressor

- T39 pump has a solid cast iron cylinder
- 14 HP Kohler Engine
- 12 volt electric and recoil start
- 25.25 ACFM at 100 PSI
- Battery Charging system
- Shipped "wet" ready for use
- 100% factory tested at full pressure
- Dimensions: 44-1/2" L x 19" W x 45" H
- 2 year "bumper-to-bumper" warranty!

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IMC5020P

2 HP 20 Gallon

115 Volt Single Phase Portable Compressor

- 8.31 ACFM @ 40 PSI;
- 7.1 ACFM @ 100 PSI;
- 130 PSI maximum pressure
- Cast iron cylinder and stainless steel valves
- Comes with a regulator and 1/4" outlet
- Shipping weight: 165 lbs.
- 34-1/2" L x 19-1/4" D x 31-1/2" H



HOSES



BluBird®

BluBird® Air Hoses

- 40% lighter than other rubber hoses & as light as hybrids
- Designed to offer the best of both worlds - the exceptional cold-weather flexibility, durability and premium feel of high-end rubber hoses and the light-weight comfort of premium hybrid hoses
- Ultra light, super-strong rubber - resists abrasion and kinks
- Extreme ozone resistance provides protection from extreme weather
- Flexibility in extreme conditions from -50°F to 190°F
- Constructed with high strength polyester braided reinforcement
- 4 finger grip bend restrictor for better ergonomics
- Available hose inner diameters: 1/4", 3/8", 1/2" and 3/4"
- Max. working pressure: 300 PSI • 4:1 Safety factor
- 10 year warranty

Part #	Description	NPT
BLBBB14100	1/4" x 100'	1/4"
BLBBB1425	1/4" x 25'	1/4"
BLBBB1450	1/4" x 50'	1/4"
BLBBB3810	3/8" x 10'	1/4"
BLBBB38100	3/8" x 100'	1/4"
BLBBB3815	3/8" x 15'	1/4"
BLBBB3825	3/8" x 25'	1/4"
BLBBB3835	3/8" x 35'	1/4"
BLBBB3850	3/8" x 50'	1/4"
BLBBB1210	1/2" x 10'	1/4"
BLBBB12100	1/2" x 100'	1/2" to 3/8" NPT Reducer
BLBBB1215	1/2" x 15'	1/4"
BLBBB1225	1/2" x 25'	1/2" to 3/8" NPT Reducer
BLBBB1250	1/2" x 50'	1/2" to 3/8" NPT Reducer
BLBBB3415	3/4" x 15'	
BLBBB3425	3/4" x 25'	

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Oil Shield®

Oil Shield® Next-Gen Rubber Air Hoses

- The Lightest Class A Oil Resistant Hose
- Ultra light, super-strong rubber
- RMA Class A oil resistant core tube and cover
- Constructed with high strength polyester braided reinforcement
- Flexibility in extreme conditions from -30°F to 180°F
- 4 finger grip bend restrictor for better ergonomics
- Available hose inner diameters: 1/4", 3/8", 3/4" and 1/2"
- Max. working pressure: 300 PSI • 4:1 Safety factor
- 3 year warranty

Part #	Description	NPT	
BLBOS3810	3/8" x 10'	1/4"	
BLBOS3815	3/8" x 15'	1/4"	
BLBOS3825	3/8" x 25'	1/4"	
BLBOS3835	3/8" x 35'	1/4"	
BLBOS3850	3/8" x 50'	1/4"	
BLBOS38100	3/8" x 100'	1/4"	
BLBOS1225	1/2" x 25'	1/2"	Includes 1/2" to 3/8" NPT Reducer
BLBOS1250	1/2" x 50'	1/2"	Includes 1/2" to 3/8" NPT Reducer
BLBOS12100	1/2" x 100'	1/2"	Includes 1/2" to 3/8" NPT Reducer
BLBOSPRO3425	3/4" x 25'	3/4"	
BLBOSPRO3450	3/4" x 50'	3/4"	

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSES



Flexibility in extreme conditions from -40°F to 190°F



Avagard® Professional Rubber Air Hoses

- 80% the weight of traditional red rubber hoses
- Ozone resistant cover provides protection from extreme weather, abrasions & kinks
- Resists mild grease, oil & diesel
- Constructed with high strength polyester braided reinforcement
- Flexibility in extreme conditions from -40°F to 190°F
- 4 finger grip bend restrictor for better ergonomics
- Available hose inner diameters: 1/4", 3/8" and 1/2"
- Max. working pressure: 300 PSI • Safety factor: 4:1

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part #	Description	NPT
BLBAVG1410	AvaGard 1/4" x 10' Air Hose, Red	1/4"
BLBAVG1415	AvaGard 1/4" x 15' Air Hose, Red	1/4"
BLBAVG1425	AvaGard 1/4" x 25' Air Hose, Red	1/4"
BLBAVG1450	AvaGard 1/4" x 50' Air Hose, Red	1/4"
BLBAVG14100	AvaGard 1/4" x 100' Air Hose, Red	1/4"
BLBAVG3810	AvaGard 3/8" x 10' Air Hose, Red	1/4"
BLBAVG3815	AvaGard 3/8" x 15' Air Hose, Red	1/4"
BLBAVG3825	AvaGard 3/8" x 25' Air Hose, Red	1/4"
BLBAVG3850	AvaGard 3/8" x 50' Air Hose, Red	1/4"
BLBAVG38100	AvaGard 3/8" x 100' Air Hose, Red	1/4"
BLBAVG1210	AvaGard 1/2" x 10' Air Hose, Red	1/2"
BLBAVG1215	AvaGard 1/2" x 15' Air Hose, Red	1/2"
BLBAVG1225	AvaGard 1/2" x 25' Air Hose, Red	1/2"
BLBAVG1250	AvaGard 1/2" x 50' Air Hose, Red	1/2"
BLBAVG12100	AvaGard 1/2" x 100' Air Hose, Red	1/2"
BLBAVG3415	AvaGard 3/4" x 15' Air Hose, Red	3/4"
BLBAVG3425	AvaGard 3/4" x 25' Air Hose, Red	3/4"
BLBAVG3450	AvaGard 3/4" x 50' Air Hose, Red	3/4"

The Pinnacle of RED RUBBER HOSES

Stays flexible in extreme cold weather! -40°F to 190°F

5 Year Warranty

ULTIMATE DURABILITY

EOR Extreme Ozone Resistance

UA Ultimate Agility at 80% the weight

R Resists Mild Grease, Oil & Diesel

HOSES



Flexibility in extreme conditions from -50°F to 190°F



BluBird® Pro Quick-Connects Edition

- Light as a feather with industrial type quick connect coupler & plug
- 40% Lighter than traditional rubber hoses
- Extremely resistant to ozone, UV & abrasion
- Flexibility in extreme conditions from -50°F to 190°F
- 300 PSI working pressure with 4:1 safety factor where as hybrids have 3:1 safety factor
- Does not kink under pressure
- 3/8" NPT ends with 3/8" to 1/4" NPT reducer
- 4 finger grip bend-restrictor to prevent damage near ends
- Heavy-duty brass industrial type quick connects with 1/4" female ends
- 4:1 Safety factor • 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part #	Description
BLBBB1450QC	1/4" x 50'
BLBBB14100QC	1/4" x 100'
BLBBB3850QC	3/8" x 50'
BLBBB3450	3/4" x 50'



BluBird® Rubber Air Hose with FastFix®

- 40% lighter than traditional rubber hoses
- Ideal for Roofers and Contractors
- Flexibility in extreme conditions from -50°F to 190°F
- FastFix fittings to repair damaged on-site in few minutes
- Comes with FastFix Field repair fittings
- 4 finger grip bend-restrictor to prevent damage near ends
- 4:1 Safety factor • 1/4" NPT ends
- Covered by a 1 year warranty



Part #	Description
BLBBB14100FX	1/4" x 100' Rubber Air Hose with FastFix®
BLBBB1450FX	1/4" x 50' Rubber Air Hose with FastFix®

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSES



Flexair Hoses with Safety Coupling and Plug

- Flexible hose assembly
- Comes with Prevost coupling and plug
- Hose rated to 300 PSI working pressure
- Temperature range 5°F to 140°F
- Paired with the prevoS1 safety coupling, which is ISO 4414 compliant, and protective rubber guard around the clamps to eliminate scratches

Part #	Size/Color/Coupling
PRVRSTRESB3835	3/8" ID X 35' - Green/High Flow
PRVRSTRESB3825	3/8" ID X 35' - Green/High Flow
PRVRSTRESB1450	1/4" ID X 50' - Green/High Flow
PRVRSTRESB1425	1/4" ID X 25' - Green/High Flow
PRVRSTRASB3835	3/8" ID X 35' - Yellow/ARO 210
PRVRSTRASB3825	3/8" ID X 25' - Yellow/ARO 210
PRVRSTRASB1450	1/4" ID X 50' - Yellow/ARO 210
PRVRSTRASB1425	1/4" ID X 25' - Yellow/ARO 210
PRVRSTRUSB3835	3/8" ID X 35' - Red/Automotive
PRVRSTRUSB3825	3/8" ID X 25' - Red/Automotive
PRVRSTRUSB1450	1/4" ID X 50' - Red/Automotive
PRVRSTRUSB1425	1/4" ID X 25' - Red/Automotive
PRVRSTRISB3835	3/8" ID x 35' - Blue/Industrial
PRVRSTRISB3825	3/8" ID x 25' - Blue/Industrial
PRVRSTRISB1450	1/4" ID x 50' - Blue/Industrial
PRVRSTRISB1425	1/4" ID x 25' - Blue/Industrial



Flexzilla® ZillaGreen Air Hose

- Extreme all weather flexibility, even in sub zero temperatures! (-40° to 150° F)
- Kink resistant under pressure
- No memory, lays flat
- Excellent abrasion-resistant outer cover
- Includes bend restrictors that reduce wear and tear
- Maximum working pressure: 300 PSI
- Engineered polymer-blend material permits use in environments where general purpose PVC and rubber hoses may become stiff



LEGHFZ12100YW3 - 1/2" x 100' **LEGHFZ3850YW2** - 3/8" x 50'

Part Number Rubber Hoses	Hose Color	Hose Material	Hose Diameter	Length	NPT	Working Pressure	Burst Pressure	Additional Features
MILMA3825OR	Red	Hybrid Polymer	3/8"	25'	1/4"	300 PSI	-	Bend Restrictors
LEGHFZ3825YW2	"ZillaGreen"	Hybrid Polymer	3/8"	25'	1/4"	300 PSI		Bend Restrictors
MILMA3835OR	Red	Hybrid Polymer	3/8"	35'	1/4"	300 PSI	-	Bend Restrictors
LEGHFZ3835YW2	"ZillaGreen"	Hybrid Polymer	3/8"	35'	1/4"	300 PSI		Bend Restrictors
LEGHFZ3850YW2	"ZillaGreen"	Hybrid Polymer	3/8"	50'	1/4"	300 PSI	1,200 PSI	Bend Restrictors
LEGHFZP3850YW2	"ZillaGreen"	Hybrid Polymer	3/8"	50'	1/4"	300 PSI		Bend Restrictors
MILMA3850OR	Red	Hybrid Polymer	3/8"	50'	1/4"	300 PSI	-	Bend Restrictors
MILMA38100OR	Red	Hybrid Polymer	3/8"	100'	1/4"	300 PSI	-	Bend Restrictors
MILMA1250OR	Red	Hybrid Polymer	1/2"	50'	1/4"	300 PSI	-	Bend Restrictors
LEGHFZ1250YW3	"ZillaGreen"	Hybrid Polymer	1/2"	50'	3/8"	300 PSI		Bend Restrictors
LEGHFZ12100YW3	"ZillaGreen"	Hybrid Polymer	1/2"	100'	3/8"	300 PSI	1,200 PSI	Bend Restrictors

HOSES



BLBBBJH3450

BluBird® Pro Jack Hammer Hose

3/4" x 50' with Stainless Steel Ends

- Ultra-light & super-strong rubber
- Ozone resistant cover provides protection from extreme weather, abrasions & kink
- Flexibility in extreme conditions from -50° F to 190° F
- Factory crimped stainless steel universal claw couplings for better durability
- Wrapped finish gives better flexibility and abrasion resistance
- Covered by a 2 year warranty



Flexibility in extreme conditions from -50°F to 190°F



BLBAVGJH3450

Avagard® Jack Hammer

HD Rubber Hose - 3/4" x 50'

- Heavy Duty rubber hose that's 20% lighter than others conventional hoses
- Ozone & UV resistant to prevent cracking
- Cold Weather Flexibility down to -40°F
- Handles Hot Water up to 190°F
- 4 Finger Grip Bend Restrictors



Handles hot water up to 190° F



Whip Hoses & Snubber Hoses



BluBird® Whip Hoses

- Professional air tool snubber hose, 300 PSI working pressure
- Extends coupler service life & improves maneuverability
- Absorbs shock to air couplers from pneumatic tools
- Reduces twisting and kinking
- Flexible rubber construction, with 4 finger-grip bend restrictor
- Covered by a 90 day material and workmanship warranty



Oil Shield® Whip Hoses

- Professional air tool lead in / snubber hose, 300 PSI working pressure
- Oil resistant core tube and cover meets RMA Class A oil resistance
- Absorbs shock to air couplers from pneumatic tools
- Flexible rubber construction, with 4 finger-grip bend restrictor
- Covered by a 90 day material and workmanship warranty

Part #	Description	NPT
BLBBBSR3802	3/8" x 2' with 360° Ball Swivel	1/4"
BLBBBSR3803	3/8" x 3' with 360° Ball Swivel	1/4"
BLBBBSR3805	3/8" x 5' with 360° Ball Swivel	1/4"
BLBBBSR1202	1/2" x 2' with 360° Ball Swivel	1/2"
BLBBBSR1205	1/2" x 5' with 360° Ball Swivel	1/2"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part #	Description	NPT
BLBOSSR3802	3/8" x 2' with 360° Swivel	1/4"
BLBOSLD3803	3/8" x 3' Whip Hose	1/4"
BLBOSSR3805	3/8" x 5' with 360° Swivel	1/4"
BLBOSLD1203	1/2" x 2' Whip Hose	1/2"
BLBOSSR1205	1/2" x 5' Whip Hose	1/2"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



PRVWHSTO38I251

Whip Hose 3/8" ID for Tool Connection

- STOFLEX whip hose assembly to increase quick coupling and hose life
- 3/8" ID X 24" Long • 1/4" MNPT each end
- 1-year Manufacturing Defects



PRVPUS266V

Green Polyurethane

5/16" ID Spiral Hose Assembly

- 5/16" ID X 20' extended length
- 1/4" fixed MNPT on supply end, 1/4" rotating MNPT of tool end
- Oil and Gas resistant
- 1-year Manufacturing Defects



HOSES

Whip Hoses & Snubber Hoses



Swivel Whip Hoses

- Red rubber whip hose with brass ferrule
- 1/4" swivel MNPT + 1/4" fixed FNPT fittings
- 300 PSI
- Covered by a 90 day material and workmanship warranty



Part #	Description	Swivel
BLBAVGSR3803KT	3/8" x 3' Swivel Whip Hose with 360° Ball Swivel	1/4"
BLBAVGSR3806KT	3/8" x 6' Swivel Whip Hose with 360° Ball Swivel	1/4"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



BluBird® Lead-in Hoses

- Ultra-light & super-strong: finally, a rubber hose that's 40% lighter than others and as light as hybrid / PVC hoses
- Makes a flexible connection from rigid supply line to hose reel
- Braided, polyester gives 300PSI working pressure
- Flexibility in extreme conditions from -50°F to 190°F
- Comes with 1/4" brass MNPT end fittings
- 4 finger grip bend restrictors
- Covered by a 1 year warranty



Part #	Description	NPT
BLBBBLD1203	1/2" x 3' Lead in Hose	1/2"
BLBBBLD3803	3/8" x 3' Lead in Hose	1/4"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Utility Hoses



Yellow Rubber Air Hoses

- Solid brass end MNPT fittings
- Protective PVC bend restrictor ends
- Abrasion-resistant rubber outer jacket
- 300 PSI working pressure
- 1 year warranty

Part #	Description	NPT
BLBAVG3825YLKT*	3/8" x 25' Air Hose, Red	1/4"
BLBAVG3835YLKT*	3/8" x 35' Air Hose, Red	1/4"
BLBAVG3850YLKT*	3/8" x 50' Air Hose, Red	1/4"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Red Rubber Air Hoses

- Solid brass end MNPT fittings
- Protective PVC bend restrictor ends
- Abrasion-resistant rubber outer jacket
- 300 PSI working pressure
- 1 year warranty

Part #	Description	NPT
BLBAVGLD3803KT*	3/8" x 3' Air Hose, Red	1/4"
BLBAVG3825KT*	3/8" x 25' Air Hose, Red	1/4"
BLBAVG3850KT*	3/8" x 50' Air Hose, Red	1/4"
BLBAVG1225KT38*	1/2" x 25' Air Hose, Red	3/8"
BLBAVG1225KT12*	1/2" x 25' Air Hose, Red	1/2"
BLBAVG1250KT38*	1/2" x 50' Air Hose, Red	3/8"
BLBAVG1250KT12*	1/2" x 50' Air Hose, Red	1/2"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSE REELS



BluBird® Air Hose Reels

- Smooth auto-rewind with locking 12 point ratchet gearing system which helps to lock at various lengths
- Heavy duty steel construction with powder coated, corrosion proof finish
- Four rollers reduce hose wear
- Horizontal and vertical wall mount options with adjustable guide arm
- Flexibility in extreme conditions from -50°F to 190°F
- Can be mounted on wall, ceiling and floor
- 4:1 Safety factor
- 2 year warranty on hose reel and 10 year warranty on attached hose to any manufacturing defects



Part #	Description	NPT
BLBBBR1450	1/4" x 50' Air Hose Reel	3/8" inlet and 1/4" NPT Outlet
BLBBBR3825	3/8" x 25' Air Hose Reel	3/8" inlet and 3/8" to 1/4" NPT Reducer Outlet
BLBBBR3850	3/8" x 50' Air Hose Reel	3/8" inlet and 3/8" to 1/4" NPT Reducer Outlet
BLBBBR3875	3/8" x 75' Air Hose Reel	3/8" inlet and 3/8" to 1/4" NPT Reducer Outlet
BLBBBR1225	1/2" x 25' Air Hose Reel	3/8" inlet and 1/2" to 3/8" NPT Reducer Outlet
BLBBBR1250	1/2" x 50' Air Hose Reel	3/8" inlet and 1/2" to 3/8" NPT Reducer Outlet
BLBBBR1265	1/2" x 65' Air Hose Reel	3/8" inlet and 1/2" to 3/8" NPT Reducer Outlet
BLBBBLD3803RL	Replacement Lead Hose for BLBBBR3850	
BLBBBLD1203RL	Replacement Lead Hose for BLBBBR1250	
BLBBB3850RL	Replacement Hose for BLBBBR3850	

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



BluBird® Heavy Duty 18 Gauge Steel Air Hose Reels

- Retractable hose reel with BluBird® air hose
- Powder coated steel - corrosion resistant, heavy duty 18 gauge steel
- 12 point ratchet for locking at shorter intervals
- 4-way roller guides
- 3' whip hose included
- Flexibility in extreme conditions from -50°F to 190°F
- 4:1 Safety factor
- Covered by a 2 year warranty on reel with 10 year warranty on attached hose to any manufacturing defects

Part #	Description	NPT
BLBBBRHD1250	1/2" x 50' Heavy Duty Air Hose Reel	3/8" inlet and 1/2" to 3/8" NPT Reducer Outlet
BLBBBRHD3850	3/8" x 50' Heavy Duty Air Hose Reel	3/8" inlet and 3/8" to 1/4" NPT Reducer Outlet

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSE REELS



BLBBBRDA3850

BluBird Heavy Duty Dual-Arm

Retractable Air Hose Reel 3/8" x 50'

- ULTIMATE SOLUTION FOR A PRO! Powder Coated Steel - Corrosion Resistant, Dual Arm Heavy Duty 18 Gauge
- 12 Point Ratchet for locking at shorter intervals
- 50% Wider Spring with Rubber Gasket for extreme durability
- 3' Whip hose included along with a 3/8" to 1/4" reducer
- Perfect for mounting on mobile applications
- Reel is covered by a 2 year warranty and hose is covered by a 10 year warranty



BLBBBRDA1250

BluBird Heavy Duty Dual-Arm

Retractable Air Hose Reel 1/2" x 50'

BLBOSRDA3850

Oil Shield Heavy Duty Dual-Arm

Retractable Air Hose Reel 3/8" x 50'

- Powder Coated Steel - Corrosion Resistant, DUAL ARM Heavy Duty 18 Gauge Steel
- Perfect for mounting on mobile applications
- Meets RMA Class A Oil Resistance
- 12 Point Ratchet for locking at shorter intervals
- 50% Wider Spring with Rubber Gasket for extreme durability
- 3' whip hose include along with a 1/2" to 3/8" reducer
- Reel is covered by a 2 year warranty and hose is covered by a 3 year warranty



on Hoses



on Hose Reels



Flexibility in extreme conditions from -30°F to 180°F



BLBOSRDA1250

Oil Shield Heavy Duty Dual-Arm

Retractable Air Hose Reel 1/2" x 50'



Flexibility in extreme conditions from -50°F to 190°F

BLBBBRSS3850

BluBird Heavy Duty Stainless Steel

Retractable Air Hose Reel 3/8" x 50'

- 18 gauge stainless steel 304 construction
- Includes 3' inlet hose
- 12 point ratchet for precise resolution, adjustable outlet arm, 4 way roller guides, ceiling floor, wall mounting options
- 40% lighter, cold weather flex up to -50°F
- Covered by a 1 year warranty



HOSE REELS



Oil Shield® Air Hose Reels

- Retractable air hose reel with BluBird® Oil Shield® air hose
- Powder coated steel - corrosion resistant, heavy duty 18 gauge steel
- Flexibility in extreme conditions from -30°F to 180°F
- 12 point ratchet for locking at shorter intervals
- 4-way roller guides • 4:1 Safety factor
- Covered by a 2 year warranty on reel with 3 year warranty on the included yellow Oil Shield® hose

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part #	Description	NPT
BLBOSR3825	3/8" x 25' Oil Shield® Air Hose Reel	3/8"NPT inlet and 1/4" outlet
BLBOSR3835	3/8" x 35' Oil Shield® Air Hose Reel	3/8"NPT inlet and 1/4" outlet
BLBOSR3850*	3/8" x 50' Oil Shield® Air Hose Reel	3/8"NPT inlet and 1/4" outlet
BLBOSR3875*	3/8" x 75' Oil Shield® Air Hose Reel	3/8"NPT inlet and 1/4" outlet
BLBOSR1225	1/2" x 25' Oil Shield® Air Hose Reel	3/8"NPT inlet and 1/2" NPT with 1/2" to 3/8" Reducer outlet
BLBOSR1250*	1/2" x 50' Oil Shield Air Hose Reel	3/8"NPT inlet and 1/2" NPT with 1/2" to 3/8" Reducer outlet
BLBOSLD3803RL*	Replacement Lead Hose for BLBOSR3850	



Oil Shield® Heavy Duty 18 Gauge Steel Air Hose Reels

- Retractable hose reel with Oil Shield® air hose
- Powder coated steel - corrosion resistant, heavy duty 18 gauge steel
- 12 Point ratchet for locking at shorter intervals
- Flexibility in extreme conditions from -50°F to 180°F
- 4-way roller guides • 3' whip hose included • 4:1 Safety factor
- Retractable hose reel with Oil Shield® hose, 12 point ratchet, powder coated
- 2 year warranty on reel with 3 year warranty on attached hose

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part #	Description	NPT
BLBOSRHD3850	3/8" x 50' Oil Shield® Air Hose Reel	3/8" inlet with 3/8" to 1/4" NPT Reducer outlet
BLBOSRHD1250	1/2" x 50' Oil Shield® Air Hose Reel	3/8" inlet with 1/2" to 3/8" NPT Reducer outlet
BLBOSRHD1265	1/2" x 65' Oil Shield® Air Hose Reel	3/8" inlet with 1/2" to 3/8" NPT Reducer outlet



BLBAVGR3850*

AVAGARD® Black Steel Hose Reel with 3/8" x 50' Rubber Air Hose

- All steel constructed with 300 PSI red 50' rubber hose
- 3/8" NPT inlet and 1/4" outlet • Slotted mounting base
- Automatic spring powered recoil
- Flexibility in extreme conditions from -40°F to 190°F
- 12 position ratchet gear locks reel at shorter hose length
- 1 year warranty on reel with 5 year warranty on attached hose

BLBAVGLD3803RL*

Replacement Lead Hose for BLBAVGR3850

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



on Hoses



on Hose Reels



Flexibility in extreme conditions from -40°F to 190°F

HOSE REELS



Levelwind™ Retractable Hose Reel for Air with 3/8" ID

- Levelwind™ Technology is a unique winding system that automatically layers hose back and forth across the reel; this ensures that the hose is coiled smoothly, easily every time
- Adjustable hose stopper will increase or decrease the length of the hose that remains when hose is fully retracted
- Seven position locking bracket
- Chose from latching hose every 3' for extended use or switch to free run for immediate automatic rewinding
- Extra large 3/4" swivel reduces flow restrictions

LEGL8305 - 50' Hose

LEGL8310 - 100' Hose



LEGL8335FZ

Levelwind™ Retractable Hose Reel for Air with 1/2" I.D. x 50' Flexzilla Hose

- Levelwind™ Technology for Flexzilla hose
- Seven position locking bracket
- Adjustable hose stopper
- Durable construction
- Latching mode switch

LEGL8306FZ - 75' Flexzilla Hose



LEGL8250FZ

Flexzilla® 3/8" x 50' Enclosed Plastic Air Reel

- Flexzilla® hose included
- Auto-rewind
- Durable construction
- Positive latching mechanism
- Mounting bracket for wall or ceiling
- Zilla Reel 3/8 x 50 Enclosed Plastic Air Reel has several features including auto-rewind, durable construction made from high quality impact resistant ABS, positive latching mechanism that locks hose at desired length, mounting bracket and bend restrictor
- 1 year warranty



LEGL8611FZ

Flexzilla® 3/8" x 50' Retractable Air Hose Reel

- Economical reels for indoor shop and industrial applications
- Multi-position guide arm allows mounting on wall, tank or overhead
- Weep holes designed to drain moisture are located on the edge of drum
- Durable heavy-duty steel construction
- Flexzilla reels are now available in the Workforce Series
- 2 year warranty



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSE REELS

LINCOLN



LIN83753

Air Reel - 50' x 3/8"

- All steel construction with 50' x 3/8" rubber hose
- Spring powered automatic recoil
- Slotted mounting base - easy installation
- 8 position ratchet system - easy positioning of hose
- 5 position adjustable outlet arm
- 300 PSI maximum Pressure • 25 CFM maximum air flow

LIN83754

Air Reel - 50' x 1/2"

- 300 PSI maximum pressure • 35 CFM maximum air flow

Lisle



LIS50350

"Side Winder" Hose Reel

- Versatile installation means the reel can be fastened in any direction, on a bench, under a bench, on a wall, from the ceiling, on a compressor or on a service truck
- Base has a six hole pattern for bench mounting and a center line pattern for mounting on a stud wall
- Supplies 28 CFM at 90 PSI. Reel holds 150 feet of 5/8" OD hose or 100' of 3/4" OD hose
- Dimensions: diameter 17-3/4", width 11", height 19"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Astro




AST3688

3/8" x 50' Auto Rewind Non-Conductive Hose Reel

- 300 PSI Air hose reel
- Automatic rewind
- Solid rubber stopper
- 4 way directional rollers
- Multi position mounting arm allows for floor, wall, or ceiling mounting
- Air Inlet: 1/4" • Hose Outlet: 1/4"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

TEKTON

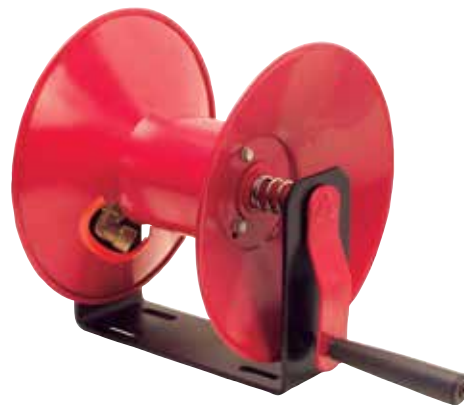

GYM4685

Manual Air Hose - Reel Only, Hand Crank, Red Metal Open Construction

- Holds 50' of Air Hose (not included)
- 1/4" NPT air inlet, 300 PSI max. working pressure
- Precision machined brass air inlet fitting for leak-free operation
- Heavy gauge all steel construction
- One-piece "U" mounting bracket
- Spring tension axle brake stops and holds reel at desired position
- Comfortable swivel crank handle
- Rugged corrosion-resistant powder coat finish

HOSES

Accessories

BluBird®



BLBHR53812

Swivel Mount for Hose Reels
- 1/4" 3/8" & 1/2" Reels

- Mounting bracket allows hose reels to be mounted to the wall and swung sideways for easy use while reducing pressure on the rollers
- All steel powder coated construction
- Heavy duty swivel joints
- Suitable with most reels
- Covered by a 2 year warranty




BLBHR53812DA

BluBird Heavy Duty
140 Degree Hose Reel
Swivel Mount for RMX
Dual Arm Reels

- Easy & Quick to install
- 20 Gauge Heavy Duty Powder Coated Steel
- 4 Slotted Holes for reels & 4 slotted holes for mounting
- Covered by a 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

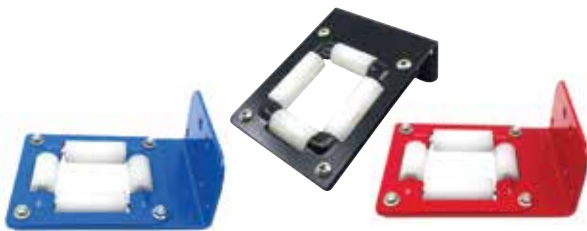

Hose Reel Roller Guides

Part #	Description
BLBR509	75', 65' & 50' Black HD Hose Reel Roller Guide Set
BLBR506	50' Blue HD Hose Reel Roller Guide Set
BLBR510	75' & 65' Blue HD Hose Reel Roller Guide Set
BLBR508	50' Red HD Hose Reel Roller Guide Set

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

BluBird®

Rubber Molded Stopper
for Hose Reels



Part #	Description
BLBR504	Rubber Molded Stopper for 5/8" & 3/4" Hose Reels

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IPA
FUTURE NOW®



IPA9060M5

5 Piece Lock-On Air Chuck Kit

- Flow through design type
- Strong and secure lock every time
- Rubber, no-slip comfort grip
- Double head chuck length: 15.5"
- Straight chuck length: 7-3/4"
- High quality straight and reverse lock-on chucks maintain engagement of tire valve during inflation and pressure reading
- Ideal for use with IPA #9060 Mobile Tire Pressure Equalizer
- Kit includes: (3) Straight Chucks, (2) Reverse Chucks

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSES

Compressor and Inflator Kits



BLBBB1425KIT

13 Piece BluBird® Air Compressor Kits

- Hose: 40% lighter than traditional rubber hoses, resists kinks and extreme weather, 4 finger grip bend restrictors, 300 PSI 1200 PSI
- Flexibility in extreme conditions from -50°F to 190°F
- Perfect for DIY & contractors • 4:1 Safety factor
- Heavy duty industrial type couplers & plugs in brass
- 10 year warranty on hose and 2 year warranty on accessories

Kit Includes: BluBird Air Hose, Safety Blow gun (1), Tire gauge (1), Air Chuck (1), Male Plugs Industrial style 1/4" NPT (3), Female Plugs Industrial style 1/4" NPT (2), Male Coupler Industrial style 1/4" NPT (1), Female Coupler Industrial style 1/4" NPT (1), Teflon tape (1), Storage bag (1).

BLBBB1425KIT - 1/4" x 25' **BLBBB3825KIT** - 3/8" x 25'
BLBBB3850KIT - 3/8" x 50'

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



BLBAVG3850KIT

Avagard 13 Piece Air Compressor Kits

- Hose:- Heavy Duty Rubber Hoses, Resists kinks and extreme weather, 4 finger grip bend restrictors
- Heavy Duty Industrial Type Couplers & Plugs in Brass
- Perfect for DIY & Contractors
- 4 Finger Grip Bend Restrictors

Kit Includes: Avagard Air Hose, Safety Blow gun (1), Tire gauge (1), Air Chuck (1), Male Plugs Industrial style 1/4" NPT (3), Female Plugs Industrial style 1/4" NPT (2), Male Coupler Industrial style 1/4" NPT (1), Female Coupler Industrial style 1/4" NPT (1), Teflon tape (1), Storage bag (1).

BLBAVG1425KIT - 1/4" x 25'

BLBAVG3825KIT - 3/8" x 25'

BLBAVG3850KIT - 3/8" x 50'

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



BLBBBFLT3850*

BB IPA9060 Fleet Edition Kit

- Featuring the lightest, strongest, most flexible all-weather BluBird® air hose 3/8" x 50' with 1/4" MNPT
- Includes Phillips heavy duty aluminum universal glad hand
- Includes a 1/4" to 1/2" adapter for fitting to Phillips glad hand (made in USA) Teflon™ tape and a carry bag for easy storage after use
- Dual foot chuck inflator • 4:1 Safety factor
- Flexibility in extreme conditions from -50°F to 190°F
- 10 year warranty on hose and a 2 year warranty on accessories



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov